



扫描二维码
关注康力电梯门户网站
Scan the QR code and pay attention to
CANNY ELEVATOR Portal Website



扫描二维码
关注康力电梯微信公众号
Scan the QR code and pay attention to
CANNY ELEVATOR WeChat Public Number

康力电梯股份有限公司
CANNY ELEVATOR CO.,LTD.

◎地址：江苏省滨湖高新技术产业开发区康力大道888号
◎电话：0512-63290000
◎传真：0512-63293938
◎网址：www.canny-elevator.com
◎电子信箱：(国内) marketing@canny-elevator.com
(国外) export-canny@163.com
export@canny-elevator.com
◎400客户服务热线：400-188-2367
◎邮编：215213

◎Add: No.888, Kangli Road, FOHO New & Hi-Tech Industrial
Development Zone, Jiangsu Province, China.
◎Tel: +86-512-63290000 63297851
◎Fax: +86-512-63299709
◎URL: www.canny-elevator.com
◎E-mail: export-canny@163.com
export@canny-elevator.com
◎P.C: 215213

本书为一般信息类出版物，我们保留随时更改产品设计和说明的权利，所有图片和颜色可能与实物有所不同，请以实物为准。
康力电梯股份有限公司 © 版权所有 2016-V1.0版

KONL® 康力电梯
CANNY ELEVATOR



KLG
观光电梯
KLG Panorama elevator

KLWG
无机房观光电梯
KLWG Machine room less panorama elevator

观光系列电梯
Panorama
elevator series

目光之所及 无处不风景

Scenery is wherever your vision goes



商场



酒店



写字楼



住宅楼

您在电梯里看风景
在他人眼里
这本身就是一道风景

While you enjoying the scenery in elevator,
In other's eyes,
It is also a picture of scenery.

额定速度 1.0-2.5
Rated speed



额定载重 800-1600
Rated load

KLK 观光电梯
KLK Panorama Elevator



随时关注 方便维修保养



人性细节，安心舒适

全面提升乘坐体验

- ◆ 故障自诊断系统，提供详尽的预防性维保数据参考，方便维修保养，确保良好运行。
- ◆ 串行通讯技术，大量减少了布线数，提高信息可靠性，缩短安装时间。
- ◆ BAS功能系统，实时监测电梯运行状态，并将信号传送至控制站，提高监控能力。（选配）
- ◆ IC卡智能管理，安装方便，功能丰富，让电梯安全走进家庭。（选配）
- ◆ 远程监控，通过信号接口装置、及无线网络技术，用户只需登入相应服务器即可查看信息，对电梯故障率、故障时间等进行统计分析也可实现故障短信报警。（选配）



智能群控系统（选配）

先进的智能群控系统，设计最佳响应方案，分配呼梯要求，智能、可靠，提升运输效率。

Intelligent group control system (Optional)

Advanced intelligent group control system designs the best response plan, distributes elevator calling requirements, which is intelligent, reliable, and can improve transport efficiency.



Humane details to make you easy and comfortable

Overall improve the riding experience

- ◆ Fault self-diagnosis system, provides detailed preventive maintenance data reference, is convenient for maintenance, and can ensure smooth operation.
- ◆ Serial communication technology greatly reduces wiring amount, improves information reliability, and shortens installation time.
- ◆ BAS functional system can real-time monitor the elevator running status, and transfer the signals to the control station, improving the monitoring ability. (Optional)
- ◆ IC card intelligent management makes installation more convenient and functions more complete, making the elevators enter into families more safely. (Optional)
- ◆ Long-distance monitor, Through signal interface device and wireless network technology, user can log in the corresponding server to check information, make statistical analysis of elevator failure rate and failure time, and achieve fault message alarm. (Optional)



技术革新，节能降耗

绿色生活常伴左右

Technology innovation, saving energy and reducing consumption

Green life is always around you

90%↑
电能转换光能

20%~35%↓
用电量


循环利用

永磁同步无齿轮曳引机

- ◆ 重量比传统曳引机轻50%，实现强效节能40%以上，无需更换油脂免维护，噪音小，营造宁静空间。

Permanent magnet synchronous gearless traction machine

- ◆ Lighter than traditional traction machine by 50%, saving energy for more than 40%, no need to replace grease, free maintenance and low noise, creating a quiet space.

自动唤醒装置

- ◆ 当固定时间内无人唤梯时，轿厢内照明及风扇将自动关闭，当有乘客召唤时，设备将自动启动，节省电梯非运行时间耗费的能源。

Automatic waking device

- ◆ When nobody calls for the elevator in a fixed time period, the light and the fan in the car will automatically shut off; When someone calls, the device will automatically start, saving energy during the standing time.



LED轿厢内照明

Internal car LED lighting

五大优势

- 灯体不发热，将90%以上电能转化为光能；
- 使用寿命长，耗电量少；
- 电梯用电量下降20%~35%；
- 芯片封装和加工不添加重金属，不含有害物质；
- 废弃后可回收利用。

Five major advantages

- No fever on lamp body, it can be converted more than 90% of electric energy into light energy;
- Long service life, less power consumption;
- Electricity consumption of elevator being decreased by 20%~35%;
- No heavy metals added in chip packaging and processing, no harmful substances contained;
- Recyclable after disposed.



扫描二维码360度了解轿厢
Scan the QR code to know more about
the lift car in the 360-degree manner

诸行圆满，景致雅然


Complete functions with
beautiful views



KL/G5-Y013 (标配 Standard)

上下罩：发纹不锈钢
观光壁：夹胶玻璃
装饰顶：KL/DD-Y013
轿壁：发纹不锈钢
轿门：发纹有框玻璃门
扶手：KL/FS-4003
地板：KL/JD-Y013

Upper / lower hood: Hairline stainless steel
Panorama wall: Laminated glass
Decorative top: KL/DD-Y013
Car wall: Hairline stainless steel
Car door: Hairline glass door with frame
Handrail: KL/FS-4003
Floor: KL/JD-Y013

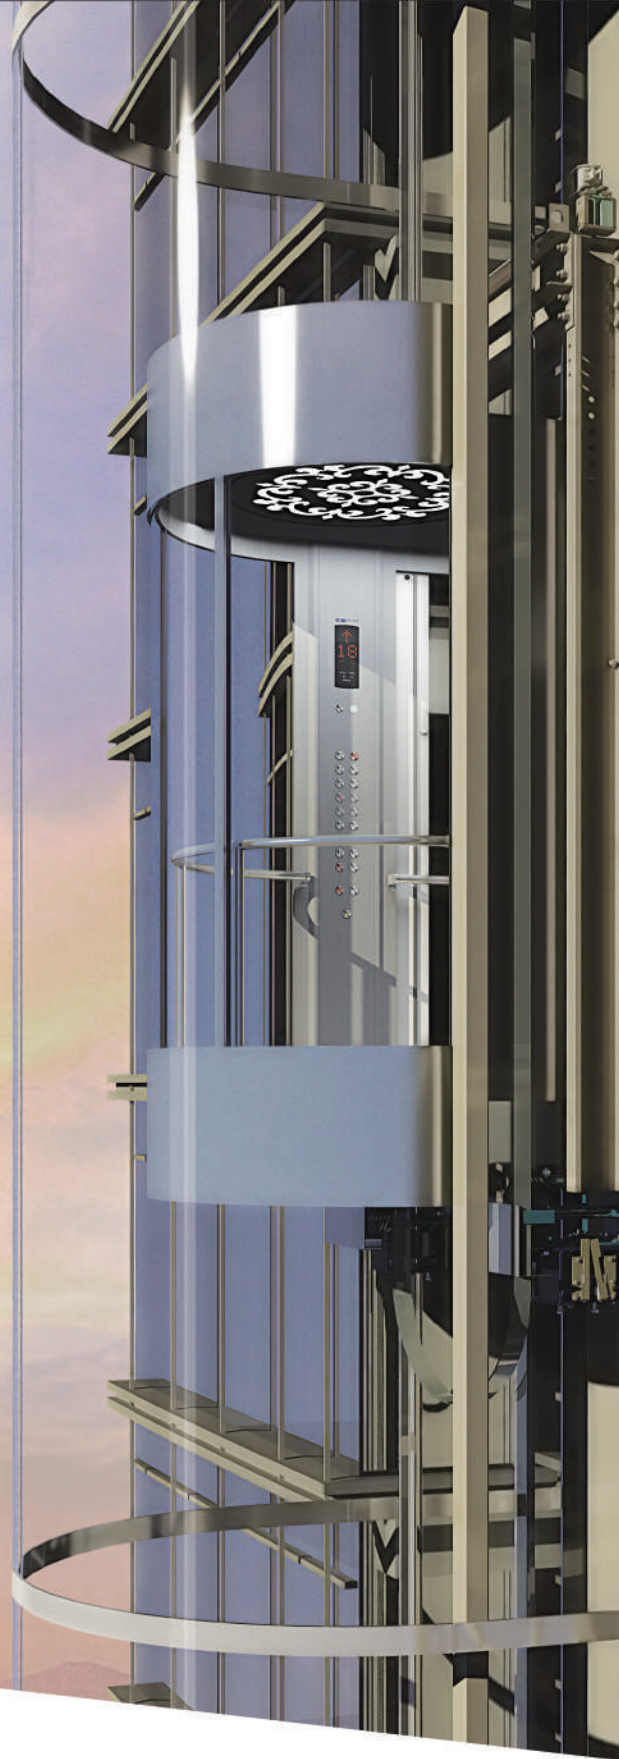

圆形轿厢系列 Round car series



KL/G5-Y014 (可选 Optional)

上下罩：发纹不锈钢
观光壁：夹胶玻璃
装饰顶：KL/DD-Y013 (可选)
轿壁：发纹不锈钢
轿门：发纹有框玻璃门
扶手：KL/FS-4003
地板：KL/JD-Y013 (可选)

Upper / lower hood: Hairline stainless steel
Panorama wall: Laminated glass
Decorative top: KL/DD-Y013 (optional)
Car wall: Hairline stainless steel
Car door: Hairline glass door with frame
Handrail: KL/FS-4003
Floor: KL/JD-Y013 (optional)



KL/G5-Y015 (可选 Optional)

上下罩：发纹不锈钢，亚克力罩
观光壁：夹胶玻璃
装饰顶：KL/DD-Y013 (可选)
轿壁：发纹不锈钢
轿门：发纹有框玻璃门
扶手：KL/FS-4003
地板：KL/JD-Y013 (可选)

Upper / lower hood: Hairline stainless steel,
acrylic cover
Panorama wall: Laminated glass
Decorative top: KL/DD-Y013 (optional)
Car wall: Hairline stainless steel
Car door: Hairline glass door with frame
Handrail: KL/FS-4003
Floor: KL/JD-Y013 (optional)



KL/G5-Y016 (可选 Optional)

上下罩：发纹不锈钢，灯带
观光壁：夹胶玻璃
装饰顶：KL/DD-Y013 (可选)
轿壁：发纹不锈钢
轿门：发纹有框玻璃门
扶手：KL/FS-4003
地板：KL/JD-Y013 (可选)

Upper / lower hood: Hairline stainless steel,
lighting decoration
Panorama wall: Laminated glass
Decorative top: KL/DD-Y013 (optional)
Car wall: Hairline stainless steel
Car door: Hairline glass door with frame
Handrail: KL/FS-4003
Floor: KL/JD-Y013 (optional)



棱角分明，光影绰约

Clear angular with graceful appearance



扫描二维码360度了解轿厢
Scan the QR code to know more about the lift car in the 360-degree manner

KL/G5-L018 (标配 Standard)

上下罩: 发纹不锈钢
观光壁: 夹胶玻璃
装饰顶: KL/DD-L018
轿壁: 发纹不锈钢
轿门: 发纹有框玻璃门
扶手: KL/FS-4004
地板: KL/JD-L018

Upper / lower hood: Hairline stainless steel
Panorama wall: Laminated glass
Decorative top: KL/DD-L018
Car wall: Hairline stainless steel
Car door: Hairline glass door with frame
Handrail: KL/FS-4004
Floor: KL/JD-L018

菱形轿厢系列 Diamond car series



KL/G5-L019 (可选 Optional)

上下罩: 发纹不锈钢
观光壁: 夹胶玻璃
装饰顶: KL/DD-L018 (可选)
轿壁: 发纹不锈钢
轿门: 发纹有框玻璃门
扶手: KL/FS-4004
地板: KL/JD-L018 (可选)

Upper / lower hood: Hairline stainless steel
Panorama wall: Laminated glass
Decorative top: KL/DD-L018 (optional)
Car wall: Hairline stainless steel
Car door: Hairline glass door with frame
Handrail: KL/FS-4004
Floor: KL/JD-L018 (optional)



KL-G 002 (可选 Optional)

上下罩: 钢板烤漆
观光壁: 夹胶玻璃
装饰顶: KL-D 013
轿壁: 发纹不锈钢
轿门: 发纹不锈钢
扶手: Φ38不锈钢管
地板: KL-JD 004

Upper / lower hood: Steel plate baked enamel
Panorama wall: Laminated glass
Decorative top: KL-D 013
Car wall: Hairline stainless steel
Car door: Hairline stainless steel
Handrail: Φ38 stainless steel pipe
Floor: KL-JD 004



KL-G 007 (可选 Optional)

上下罩: 钢板烤漆, 亚克力灯饰
上下坎: 钢板烤漆
观光壁: 夹胶玻璃 (三块)
装饰顶: KL-D 002 (可选)
轿壁: 发纹不锈钢
轿门: 发纹不锈钢
扶手: Φ38不锈钢管
地板: KL-JD 004 (可选)

Upper / lower hood: Steel plate baked enamel, acrylic lighting decoration
Upper / lower sill: Steel plate baked enamel
Panorama wall: Laminated glass (3-PCS)
Decorative top: KL-D 002 (optional)
Car wall: Hairline stainless steel
Car door: Hairline stainless steel
Handrail: Φ38 stainless steel pipe
Floor: KL-JD 004 (optional)



扫描二维码360度了解轿厢
Scan the QR code to know more about
the lift car in the 360-degree manner

方寸之间，赏心悦目

Everything is charming
within your vision



方形轿厢系列 Square car series



KL/G5-F002

(标配 Standard)

上下罩：发纹不锈钢
观光壁：夹胶玻璃
装饰顶：KL/DD-4004
轿壁：发纹不锈钢
轿门：发纹有框玻璃门
扶手：KL/FS-4001
地板：KL/JD-4003

Upper / lower hood: Hairline stainless steel
Panorama wall: Laminated glass
Decorative top: KL/DD-4004
Car wall: Hairline stainless steel
Car door: Hairline glass door with frame
Handrail: KL/FS-4001
Floor: KL/JD-4003

KL/G5-F005

(可选 Optional)

上下罩：发纹不锈钢
观光壁：夹胶玻璃
装饰顶：KL/DD-4001 (可选)
轿壁：发纹不锈钢
轿门：发纹有框玻璃门
扶手：KL/FS-4002
地板：KL/JD-4003 (可选)

Upper / lower hood: Hairline stainless steel
Panorama wall: Laminated glass
Decorative top: KL/DD-4001 (optional)
Car wall: Hairline stainless steel
Car door: Hairline glass door with frame
Handrail: KL/FS-4002
Floor: KL/JD-4003 (optional)



方形轿厢系列

Square car series



KL/G5-F008

(可选 Optional)

上下罩: 钢板烤漆、亚克力
 观光壁: 夹胶玻璃
 装饰顶: 钛黑发纹不锈钢, 亚克力, LED光源
 轿壁: 钛黑发纹不锈钢
 轿门: 钛黑发纹无框玻璃门
 操纵箱: 选配
 扶手: 扁钢, 黑檀木
 地板: 大理石拼花

Upper / lower hood: Steel plate baked enamel, acrylic
 Panorama wall: Laminated glass
 Decorative top: Titanium black hairline stainless steel, honeycomb acryl, LED light source
 Car wall: Titanium black hairline stainless steel
 Car door: Titanium black hairline glass door without frame
 Cop: Optional
 Handrail: Flat steel, ebony
 Floor: Marble medallion



KL-G 008

(可选 Optional)

上下罩: 钢板烤漆
 观光壁: 夹层玻璃
 装饰顶: KL-D 009 (可选)
 轿壁: 夹胶玻璃
 轿门: 发纹有框玻璃门
 扶手: Φ38不锈钢管
 地板: KL-JD 004 (可选)

Upper / lower hood: Steel platebaked enamel
 Panorama wall: Laminated glass
 Decorative top: KL-D 009 (optional)
 Car wall: Laminated glass
 Car door: Hairline glass door with frame
 Handrail: Φ38 stainless steel pipe
 Floor: KL-JD 004 (optional)

一体式操纵箱

Integrated operation panel

排列整齐的按钮充满理性的美感, 反应灵敏, 操作方便! 只需轻轻触摸, 即可发出操纵指令。


The buttons with the tidy arrangement are full of the rational beauty, the sensitive reaction and the convenient operation! Only a slight touch can just send the operation command.

	<p>显示屏 点阵显示屏 停层数 2-48停层</p>	<p>Display screen Dot matrix display Parking number 2-48 stop layer</p>		<p>显示屏 液晶显示屏 停层数 2-48停层</p>	<p>Display screen Liquid crystal display screen Parking number 2-48 stop layer</p>
	<p>面板材质 (发纹不锈钢) Panel material (Hairline stainless steel)</p>			<p>面板材质 (发纹不锈钢) Panel material (Hairline stainless steel)</p>	
	<p>可选按钮 Optional button</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>KL231C 标配 Standard</p> </div> <div style="text-align: center;"> <p>KL232C 无偿选配 Free optional</p> </div> </div>			<p>可选按钮 Optional button</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>KL233C 有偿选配 Charged optional</p> </div> <div style="text-align: center;"> <p>KL234C 有偿选配 Charged optional</p> </div> </div>	
	<p>面板材质 (镜面不锈钢) Panel material (Mirror stainless steel)</p>			<p>面板材质 (镜面不锈钢) Panel material (Mirror stainless steel)</p>	
<p>可选按钮 Optional button</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>KL241C 有偿选配 Charged optional</p> </div> <div style="text-align: center;"> <p>KL242C 有偿选配 Charged optional</p> </div> </div>		<p>可选按钮 Optional button</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>KL243C 有偿选配 Charged optional</p> </div> <div style="text-align: center;"> <p>KL244C 有偿选配 Charged optional</p> </div> </div>			

四面观光等操纵盘在轿壁侧面中部时, 使用KG系列操纵盘。
 When operating panel of all-around observation on the middle of the side car wall, use KG series operating panel.

一体式操纵箱 (有偿选配)

Integrated operation panel (Charged optional)

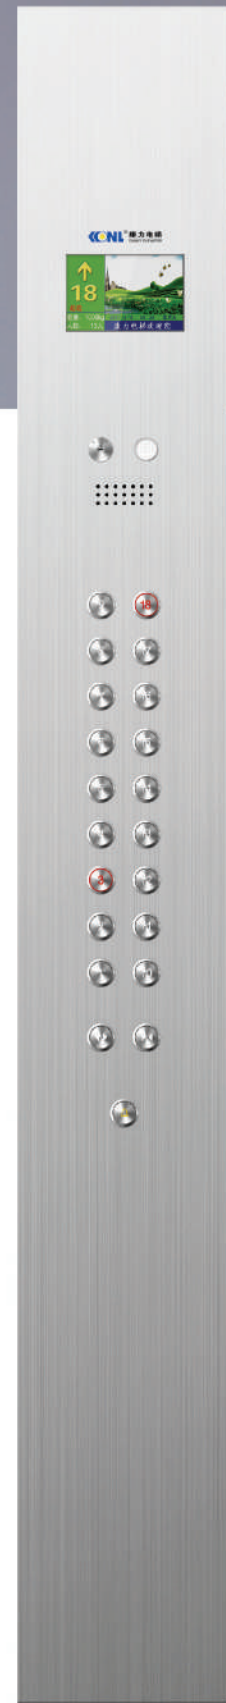

显示屏 Display screen
多媒体显示屏 Multimedia display screen
停层数 Parking number
 2-48停层 2-48 stop layer

四面观光等操纵盘在轿壁侧面中部时，使用KG系列操纵盘。
 When operating panel of all-around observation on the middle of the side car wall, use KG series operating panel.

面板材质 (发纹不锈钢)
 Panel material (Hairline stainless steel)

可选按钮 Optional button	可选屏幕尺寸 Optional screen size		
	KL235C	KL237C	KL239C
	KL236C	KL238C	KL23AC

面板材质 (镜面不锈钢)
 Panel material (Mirror stainless steel)


可选按钮 Optional button	可选屏幕尺寸 Optional screen size		
	KL245C	KL247C	KL249C
	KL246C	KL248C	KL24AC

无底盒召唤指示器

——安装简便，维保迅捷

无底盒召唤指示器用作电梯层站召唤和层楼指示，结构紧凑，壁挂式安装方式节省安装空间，通过通讯显示板的软件，在电梯待梯状态时，能降低LED点阵显示和STN-LCD液晶显示亮度，既节能又延长产品寿命。康力电梯采用无底盒召唤指示器，经过特殊工艺处理，无需土建留孔，只须预埋线管，造型简洁大方，拆卸方便，便于维修。

安装方式对比 Installation methods comparison

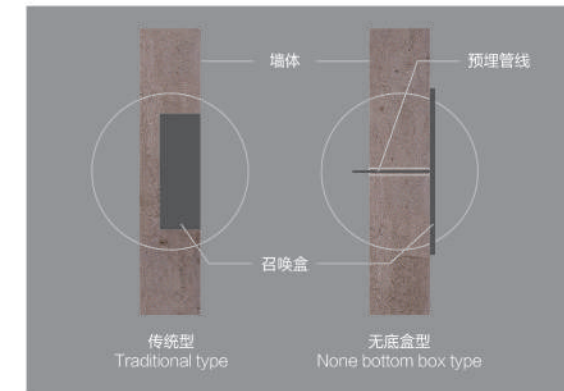

传统型：土建时需预先留孔，耗时耗力。

无底盒型：只需预埋管线，无需土建留孔，安装维修便捷。

Traditional type: It needs pre-set hole in the construction. It costs time and labor.

None bottom box type: It only requires pre-embedded lines and wires. It needs no pre-set hole. It is prompt and convenient in repair and installation.

Calling indicator without bottom box

——Convenient installation, Easy and prompt repair and maintenance

Calling indicator without bottom box is used for the elevator landing calling and floor indication with the compact structure. Wall-mounted installation mode saves the installation space. It can reduce LED dot matrix display and STN-LCD liquid crystal display luminance while the elevator awaits the passengers through software in the communication display panel. It saves the energy and prolongs the product life. CANNY elevator applies calling indicator without bottom box. It requires no construction hole through special technological treatment. It only needs pre-embedded wires and pipes. The concise and elegant model is convenient for repair and disassembly.

无底盒召唤盒

None bottom calling box



<p>KL631H 标配 Standard 点阵显示 Dot matrix display</p> <p>KL632H 无偿选配 Free optional 点阵显示 Dot matrix display</p>	<p>KL633H 有偿选配 Charged optional 液晶显示 Liquid crystal display screen</p> <p>KL634H 有偿选配 Charged optional 液晶显示 Liquid crystal display screen</p>
--	---

面板可选材质：镜面不锈钢
 Optional panel materia: Mirror stainless steel

吊顶系列

Ceiling series

多款不同的设计风格，彰显永恒尊贵。

The multiple styles of different designs show the eternal aristocracy.




KL/DD-Y013 (标配 Standard)

发纹不锈钢，筒灯，乳白色亚克力。
Hairline stainless steel, down lamp, milk white acryl



KL-D 012 (可选 Optional)

钢板烤漆顶板，亚克力灯饰，筒灯。
Steel plate baked enamel top, acrylic lighting decoration, down lamp

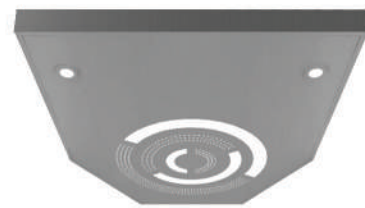

KL/DD-L018 (标配 Standard)

发纹不锈钢，筒灯，乳白色亚克力。
Hairline stainless steel, down lamp, milk white acryl



KL-D 013 (可选 Optional)

喷粉钢板框架，两侧亚克力灯饰，中间多层次透光板。


Dusting steel plate frame, acrylic lighting decoration on both sides, multi-layer light-emitting board in the middle



KL/DD-4001 (标配 Standard)

喷粉钢板，中间长方形孔，LED光源。

Dusting steel plate, square grid in the middle, LED light source

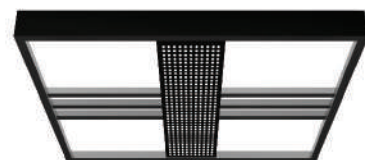

KL/DD-4004 (标配 Standard)

喷粉钢板，中撑小圆孔，LED光源。

Plastic jet steel plate, hole on center support, LED light source



KL/DD-4002 (可选 Optional)

喷粉钢板，中间方形孔，LED光源。

Dusting steel plate, square grid in the middle, LED light source



KL/DD-4003 (可选 Optional)

喷粉钢板，中间圆形孔，LED光源。

Dusting steel plate, round circle in the middle, LED light source



KL-D 006 (可选 Optional)

发纹不锈钢框架，拱形顶板加条形灯饰，LED光源设计


Hairline stainless steel frame, arched top plat plus strip lighting decoration, LED light source design

扶手 (可选)

Handrail (optional)



KL/FS-4001



KL/FS-4002



KL/FS-4003



KL/FS-4004

厅门系列

Hoist-way door series



KL-TM 001

小门套 (标配)
Small jamb (Standard)

厅门、门套：
首层发纹不锈钢，其他层为喷粉
Hoist-way door, Jamb:
The initial floor is of the hairline stainless and other floors are of the dusting.



KL-TM 002

小门套 (标配)
Small jamb (Standard)

厅门：喷粉钢板
门套：喷粉钢板
Hoist-way door: Dusting steel plate
Jamb: Dusting steel plate



KL-TM 006

小门套 (可选)
Small jamb (Optional)

厅门：发纹不锈钢，玻璃
门套：发纹不锈钢
Hoist-way door: Hairline stainless steel, glass
Jamb: Hairline stainless steel



KL/TM-4013

小门套 (可选)
Small jamb (Optional)

厅门：镜面蚀刻
门套：发纹不锈钢
Hoist-way door: Mirror, etching
Jamb: Hairline stainless steel

PVC地板 (可选)

PVC floor (optional)



KL/JD-Y013



KL/JD-L018



KL/JD-4001



KL/JD-4002



KL/JD-4003




KL/JD-4004



KL/JD-4005



KL/JD-4006




KL-JD 002



KL-JD 006

喷粉色标 (可选)

Dusting color standard (optional)



KL-SK 001
冰灰 Ice gray



KL-SK 002
飞机灰 Plane gray



KL-SK 003
米黄 Corny yellow



KL-SK 004
卵石灰 Pebble grey



KL-SK 005
群青蓝 Ultramarine blue



KL-SK 006
崧蓝蓝色 Pastel blue



KL-SK 007
浅绿色 Light green



KL-SK 008
淡粉红色 Light pink



● **抱闸力检测 Braking Force Self-Detecting**

主动定期测试抱闸力，通过提示故障及禁止电梯运行等方式，防止严重事故发生。
Actively and regularly test the brake force; prevent more serious accident by means of malfunction indication and running prohibition and so on.

● **曳引绳滑动检测 Traction Rope Slide Detection**

实时监测滑动数据并且根据需要自动进入应急减速的安全运行模式。
It provides real-time monitoring of sliding data, and can automatically enter the safe operation mode for emergency according to requirements.

● **抱闸检测保护 Braking detection protection**

通过抱闸臂检测开关对抱闸的打开与闭合实时监测。当抱闸未按要求打开时，系统将禁止电梯启动。
Brake arm detection switch executes real-time monitor to brake opening / closing. If the brake does not open by the requirements, the system will not start the elevator.

● **门区外不能开门的保护 Protection of none door opening outside door zone**

在非门区状态，禁止自动开门。
Automatic door opening is forbidden under none door zone condition.

● **低速保护 Low-speed protection**

为防止电梯在控制范围外低速运行导致安全问题而设置的保护。
It prevents elevator from low-speed running outside the control range causing any safety problem(s).

● **超载保护 Overload protection**

在电梯关门运行前，当检测到超载信号时，电梯不能关门运行，并且关门按钮无效。超载消除后自动恢复正常。
Before the elevator shuts the door, if it detects overload signal, the elevator does not shut then, "door-shut button" becomes effective. After it removes overload problem, it re-starts automatically.

● **故障自动靠站 Automatic parking in trouble**

正常运行中的电梯因故障在非平层区域内停止时，只要不是安全装置动作而引起，则电梯以低速向中间楼层方向进行自救运行，并在最近服务层停层开门，以防止困人事故的发生。
When the elevator stops in none leveling zone due to any trouble, if it is not caused by safety device action, it executes self-rescue running towards the middle floor direction at low speed. It parks and opens the door at the nearest service floor to prevent from any trapping accident.

● **电梯受阻保护 Protection of elevator blockage**

系统发出启动命令，但在预定的时间内未能正常启动，或电梯在运行，但在预定的时间内未能到达一定的距离，电梯停止运行。
When the system runs start command, it does not start within preset time nor because it is during the elevator travelling, and it does not reach certain distance within preset time as well, the elevator stops accordingly.

● **有司机运行 Attendant running**

电梯工作在司机状态，系统按轿内指令信号运行。如有层站召唤信号，顺向层站召唤自动截车。平层停车后自动开门，但不自动关门，需由司机按动关门按钮。
When it is under the operator condition, the elevator system operates according to the car command signal. If landing call signal is available, it automatically cuts as per forward landing call. The door opens automatically after the leveling parking. But it does not shut automatically until the operator presses "door closing button".

● **消防返回 Fire-fighting return**

消防开关闭合后系统进入消防返回状态；系统将消除所有层站召唤和轿内指令信号，自动返回消防基站，保持开门。如电梯正在反方向运行，则就近层停车不开门返回消防基站，保持开门。
After the fire-fighting switch closes, the system enters into fire-fighting running. The system will remove all the landing calling and car command signals, and it automatically return to fire-fighting home landing, and the door keeps open. If the elevator is traveling reversely, it parks at nearby floor, and returns to fire-fighting home landing with the door kepping closed, after that it keeps the door open.

● **基站锁梯 Home landing elevator locking**

电梯处于自动状态，关闭基站锁梯开关后，电梯将所登记的轿内指令服务完后自动返回基站，电梯进入驻停状态。一旦打开锁梯开关，电梯会立即退出驻停状态，投入正常运行。
When the elevator is under automatic condition, after it shuts home landing locking switch, the elevator will complete all the registered car command services, automatically return to home landing, it enters into parking condition. As soon as locking switch opens, it immediately exits from parking condition and throws into normal running.

● **误登记取消 Cancel the error-register**

若乘客误按了某层轿内指令按钮并已登记（轿内指令灯亮），则在电梯未运行状态下，只需再按一次该层轿内指令按钮即将该登记取消（轿内指令灯灭）。
If the passenger presses the car command button at certain floor and has registered it by mistake, (by then the car indicating lamp is bright), under the condition of none elevator running, you only require to press the car command button at the same floor to cancel the register. (By then the car indicating lamp dies out.)

● **通电自动开门 Electrified automatic door-opening**

每次电梯上电，如轿厢正在门区，电梯门将自动打开。
Every time when the elevator is electrified, if the car is in the door zone, the elevator door opens automatically.

● **轿厢内照明及风扇自动停止 Automatic stop of the car lighting and fan**

如一时间电梯无人使用，轿厢内照明和风扇将自动关闭。接到任何层站召唤命令后自动打开。
If nobody uses the elevator within certain period of time, the car illumination and fan shut off automatically and re-opens on receiving any landing call command(s).



● **楼层信号自动校正 Automatic correction of floor signal**

如果楼层显示位置有误差，系统在运行中检测到端站开关后，将自动校正楼层显示。
If the floor display position has error, after the system detects terminal switch in the travel, it will automatically correct the floor display.

● **轿内反向指令消除 Cancel reverse command(s) in the car**

当电梯运行至最远端楼层换速时，清除所有的轿内指令登记。
When the elevator travels to the farthest floor and changes the speed, it removes all the car command register.

● **呼梯按钮嵌入自诊断 Self-diagnostic embedded calling button**

若某一层站召唤按钮按下时间超过20秒而未断开，则系统认为该按钮嵌入。以后对该层层站召唤不予登记，且该按钮对应的应答灯不断闪烁报警。当该按钮断开时，退出上述状态。
If you press call button at certain landing for over 20 second, and it still does not disconnect, the system assumes that it is embedded button. It does not register the landing call of the same floor afterwards. Responsive lamp which corresponds to the button keeps flickering and alarming. When the button disconnects, it exits from above condition.

● **自动返基站 Automatic return to home landing**

无司机运行时，如果自动返基站功能设置有效，当无层站召唤信号时间到达预定的时间后，电梯自动返回基站。
In no-operator running, if automatic return function to home landing is still effective, when no-landing calling signal time fulfills preset time, the elevator returns to home landing automatically.

● **消防运行 Fire-fighting running**

消防开关闭合后系统进入消防运行；系统将消除所有层站召唤和轿内指令信号，自动返回消防基站，保持开门。如电梯正在反方向运行，则就近层停车不开门返回消防基站，保持开门并由消防员控制运行。
When the fire-fighting switch closes, the system enters into fire-fighting running. The system will remove all the landing calls and car command signals, and it automatically returns to fire-fighting home landing, and the door keeps open. If the elevator is travelling in reverse direction, it parks at nearby floor, and returns to fire-fighting home.

● **轿厢到站钟 Car arrival gong**

通过轿厢顶的钟声，提醒在轿厢内的乘客和等候在电梯候梯厅内的乘客该电梯即将到站。
Arrival gong on top of the car reminds the passengers in the car and those waiting in the hall that the elevator has arrived.

● **语音报站 Phonic station reporter**

由语音报站装置通知乘客电梯运行相关信息；在电梯到站前播报将要到站的层楼，在关门运行前播报将要运行的方向等。
Phonic station reporter informs the passengers of the relevant elevator running information. It announces the arriving landing, the traveling direction etc. before door-close and running.

● **再平层功能 Re-leveling function**

电梯停在当前层，当过多乘客进入电梯或离开电梯时，由于钢丝绳的伸长或缩短，轿厢脱离平层区域，电梯将在开门的情况下以低速运行至平层位置。
If the elevator parks on the current floor, when too many passengers enter into / leave the elevator, the car is separated from the leveling zone because of wire rope extension or shortening. The elevator will then travel to the leveling position at low speed under the condition of door-opening.

● **信号接口装置 Signal interface position**

通过信号接口装置输出电梯的基本运行状态信号。
It outputs basic running condition signal through the signal interface device.

● **自动应急平层运行 Automatic emergency leveling travel**

如果自动应急平层功能设置有效，并配置了“自动应急平层装置”，满足自动应急平层条件，电网停电后由电梯自动应急平层装置供电运行到达最近层站的平层位置，开门，让乘客安全撤离轿厢。
If automatic emergency leveling function setting is effective, it is equipped with "automatic emergency leveling device" to satisfy automatic emergency leveling conditions. After power grid fails, automatic emergency leveling device supplies electricity and the elevator travels to the leveling position of the nearest landing. It opens the door, for safe evacuation of the passengers from the car.

● **远程监控 Long-distance monitor**

通过信号接口装置、及无线网络技术，用户只需登录相应服务器即可查看信息，对电梯故障率、故障时间等进行统计分析也可实现故障短信报警。
Through signal interface device and wireless network technology, user can log in the corresponding server to check information, make statistical analysis of elevator failure rate and failure time, and achieve fault message alarm.

● **能量回馈 Energy feedback**

当配置了能量回馈装置时，将电梯轻载上行和重载下行时产生的能量回馈电网或供周边设备使用，以达到节能目的。
When energy feedback device is installed, the energy produced during the elevator light-load up-motion and heavy-load down-motion will be used by power grid and the surrounding equipments. It fulfills the energy-saving purposes.

● **电动松闸 Electric brake release**

非平衡状态下，无机房电梯，电动松闸慢速溜车，进入门区后自动报警，手动开门救援。
Under the non-balancing conditions, Machine Roomless elevator, It automatically alarms after entering into the door zone with the manual door-open aid.


注：“电动松闸”为KLWG无机房观光电梯的功能。
Note: Electric brake release for KLWG machine roomless panorama elevator.

土建参数 Construction parameter


KLG (半圆) 观光电梯
KLG (Semicircle) panoramic elevator




半圆
Semicircle

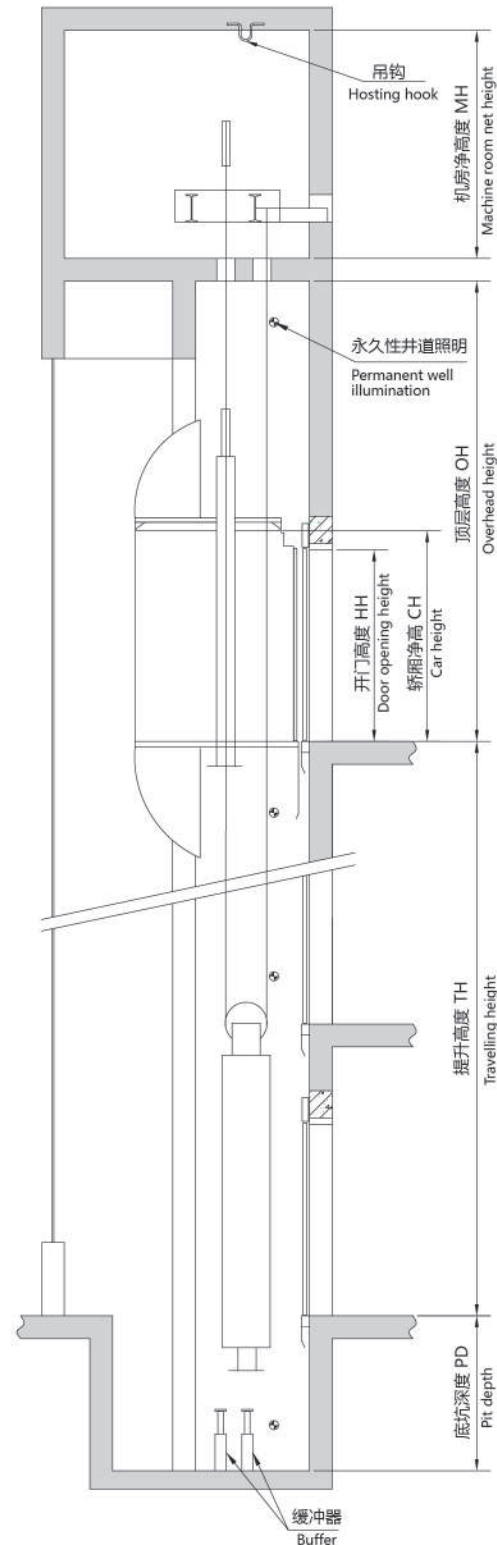

井道立面图
Hoistway section

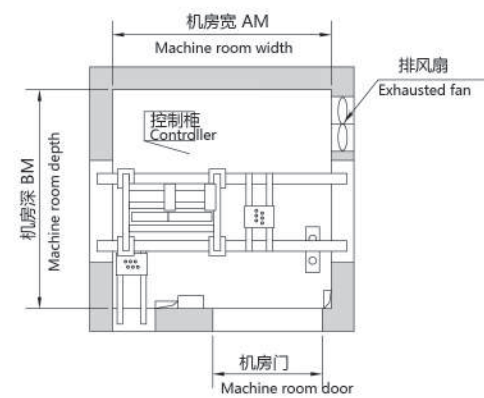

机房布置图
Machine room plan

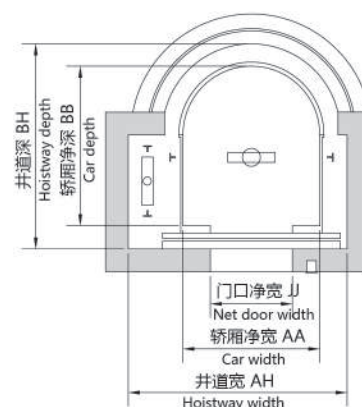

井道布置图
Hoistway plan

KLG (半圆) 观光电梯参数表

KLG (Semicircle) panoramic elevator parameter table


载重量 (Kg)	额定速度 (m/s)	开门宽度 (mm)	开门高度 (mm)	轿厢尺寸(mm)			井道尺寸(mm)		机房尺寸(mm)		顶层高度 (mm)	底坑深度 (mm)	最大提升高度 (m)
				宽	深	高	宽	深	宽	深			
800	1.0	800	2100	1300	1680	2400	2300	2200	2300	2200	4500	1800	50
	1.6	800	2100	1300	1680	2400	2300	2200	2300	2200	4600	1850	70
	1.75	800	2100	1300	1680	2400	2300	2200	2300	2200	4650	1900	70 / 100 / 120
	2.0	800	2100	1300	1680	2400	2300	2200	2300	2200	4750	1950	70 / 105 / 120
1000	1.0	900	2100	1500	1750	2400	2400	2250	2400	2250	4500	1900	50
	1.6	900	2100	1500	1750	2400	2400	2250	2400	2250	4600	1950	70
	1.75	900	2100	1500	1750	2400	2400	2250	2400	2250	4650	2000	70 / 100 / 120
	2.0	900	2100	1500	1750	2400	2400	2250	2400	2250	4750	2050	70 / 105 / 120
1150	2.5	900	2100	1500	1750	2400	2400	2250	2400	2250	4950	2200	105 / 120 / 150
	1.0	900	2100	1500	1900	2400	2450	2350	2450	2350	4350	1900	50
	1.6	900	2100	1500	1900	2400	2450	2350	2450	2350	4450	1950	80
	1.75	900	2100	1500	1900	2400	2450	2350	2450	2350	4500	2000	80 / 95 / 120
1250	2.0	900	2100	1500	1900	2400	2450	2350	2450	2350	4600	2200	80 / 105 / 120
	2.5	900	2100	1500	1900	2400	2450	2350	2450	2350	4800	2400	120 / 150
	1.0	900	2100	1500	2000	2400	2450	2450	2450	2450	4350	1900	50
	1.6	900	2100	1500	2000	2400	2450	2450	2450	2450	4450	1950	80
1350	1.75	900	2100	1500	2000	2400	2450	2450	2450	2450	4500	2000	80 / 120
	2.0	900	2100	1500	2000	2400	2450	2450	2450	2450	4600	2200	80 / 120
	2.5	900	2100	1500	2000	2400	2450	2450	2450	2450	4800	2400	120 / 150
	1.0	900	2100	1500	2150	2400	2450	2600	2450	2600	4400	1900	50
1600	1.6	900	2100	1500	2150	2400	2450	2600	2450	2600	4450	1950	80
	1.75	900	2100	1500	2150	2400	2450	2600	2450	2600	4500	2000	80 / 120
	2.0	900	2100	1500	2150	2400	2450	2600	2450	2600	4600	2100	80 / 120
	2.5	900	2100	1500	2150	2400	2450	2600	2450	2600	4700	2200	80 / 120
2.5	1100	2100	1700	2150	2400	2700	2600	2700	2600	4900	2400	120 / 150	

备注
Remarks

轿厢净高
(不含吊顶)
Car net height excluding ceiling

土建参数

Construction parameter



菱形
Diamond


KLG (菱形) 观光电梯参数表

KLG (Diamond) panoramic elevator parameter table

载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size			井道尺寸(mm) Hoistway size		机房尺寸(mm) Machine room size		顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max. travelling height
				宽 Width	深 Depth	高 Height	宽 Width	深 Depth	宽 Width	深 Depth			
800	1.0	800	2100	1300	1680	2400	2300	2200	2300	2200	4500	1800	50
	1.6	800	2100	1300	1680	2400	2300	2200	2300	2200	4600	1850	70
	1.75	800	2100	1300	1680	2400	2300	2200	2300	2200	4650	1900	70 / 100 / 120
	2.0	800	2100	1300	1680	2400	2300	2200	2300	2200	4750	1950	70 / 105 / 120
1000	1.0	900	2100	1500	1750	2400	2400	2250	2400	2250	4500	1800	50
	1.6	900	2100	1500	1750	2400	2400	2250	2400	2250	4600	1850	70
	1.75	900	2100	1500	1750	2400	2400	2250	2400	2250	4650	1900	70 / 100 / 120
	2.0	900	2100	1500	1750	2400	2400	2250	2400	2250	4750	1950	70 / 105 / 120
1150	2.5	900	2100	1500	1750	2400	2400	2250	2400	2250	4950	2100	105 / 120 / 150
	1.0	900	2100	1500	1900	2400	2450	2350	2450	2350	4250	1800	80
	1.6	900	2100	1500	1900	2400	2450	2350	2450	2350	4350	1850	80
	1.75	900	2100	1500	1900	2400	2450	2350	2450	2350	4400	1900	80 / 95 / 120
1250	2.0	900	2100	1500	1900	2400	2450	2350	2450	2350	4500	2200	80 / 105 / 120
	2.5	900	2100	1500	1900	2400	2450	2350	2450	2350	4700	2400	120 / 150
	1.0	900	2100	1500	2000	2400	2450	2450	2450	2450	4250	1800	50
	1.6	900	2100	1500	2000	2400	2450	2450	2450	2450	4350	1850	80
1350	1.75	900	2100	1500	2000	2400	2450	2450	2450	2450	4400	1900	80 / 120
	2.0	900	2100	1500	2000	2400	2450	2450	2450	2450	4500	2200	80 / 120
	2.5	900	2100	1500	2000	2400	2450	2450	2450	2450	4700	2400	120 / 150
	1.0	900	2100	1500	2150	2400	2450	2600	2450	2600	4250	1800	50
1600	1.6	900	2100	1500	2150	2400	2450	2600	2450	2600	4350	1850	80
	1.75	900	2100	1500	2150	2400	2450	2600	2450	2600	4400	1900	80 / 120
	2.0	900	2100	1500	2150	2400	2450	2600	2450	2600	4500	2200	80 / 120
	2.5	900	2100	1500	2150	2400	2450	2600	2450	2600	4700	2400	120 / 150

备注
Remarks

轿厢净高
(不含吊顶)
Car net height excluding ceiling



平面
Plane

KLG (平面) 观光电梯参数表

KLG (Plane) panoramic elevator parameter table



载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size			井道尺寸(mm) Hoistway size		机房尺寸(mm) Machine room size		顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max. travelling height
				宽 Width	深 Depth	高 Height	宽 Width	深 Depth	宽 Width	深 Depth			
800	1.0	800	2100	1300	1600	2400	2300	2200	2300	2200	4500	1450	50
	1.6	800	2100	1300	1600	2400	2300	2200	2300	2200	4600	1500	70
	1.75	800	2100	1300	1600	2400	2300	2200	2300	2200	4650	1500	70 / 100 / 120
	2.0	800	2100	1300	1600	2400	2300	2200	2300	2200	4750	1850	70 / 105 / 120
1000	1.0	900	2100	1500	1600	2400	2400	2250	2400	2250	4500	1450	50
	1.6	900	2100	1500	1600	2400	2400	2250	2400	2250	4600	1500	70
	1.75	900	2100	1500	1600	2400	2400	2250	2400	2250	4650	1500	70 / 100 / 120
	2.0	900	2100	1500	1600	2400	2400	2250	2400	2250	4750	1850	70 / 105 / 120
1150	2.5	900	2100	1500	1600	2400	2400	2250	2400	2250	4950	2050	105 / 120 / 150
	1.0	900	2100	1500	1750	2400	2450	2350	2450	2350	4200	1750	50
	1.6	900	2100	1500	1750	2400	2450	2350	2450	2350	4350	1800	80
	1.75	900	2100	1500	1750	2400	2450	2350	2450	2350	4350	1850	80 / 95 / 120
1250	2.0	900	2100	1500	1750	2400	2450	2350	2450	2350	4450	2200	80 / 105 / 120
	2.5	900	2100	1500	1750	2400	2450	2350	2450	2350	4650	2400	120 / 150
	1.0	900	2100	1500	1850	2400	2450	2450	2450	2450	4200	1750	50
	1.6	900	2100	1500	1850	2400	2450	2450	2450	2450	4300	1800	80
1350	1.75	900	2100	1500	1850	2400	2450	2450	2450	2450	4350	1850	80 / 120
	2.0	900	2100	1500	1850	2400	2450	2450	2450	2450	4450	2200	80 / 120
	2.5	900	2100	1500	1850	2400	2450	2450	2450	2450	4650	2400	120 / 150
	1.0	900	2100	1500	2000	2400	2450	2600	2450	2600	4200	1750	50
1600	1.6	900	2100	1500	2000	2400	2450	2600	2450	2600	4300	1800	80
	1.75	900	2100	1500	2000	2400	2450	2600	2450	2600	4350	1850	80 / 120
	2.0	900	2100	1500	2000	2400	2450	2600	2450	2600	4450	2200	80 / 120
	2.5	900	2100	1500	2000	2400	2450	2600	2450	2600	4650	2400	120 / 150

备注
Remarks


轿厢净高
(不含吊顶)
Car net height excluding ceiling

土建参数 Construction parameter

KLWG 无机房观光电梯
KLWG Machine roomless panoramic elevator

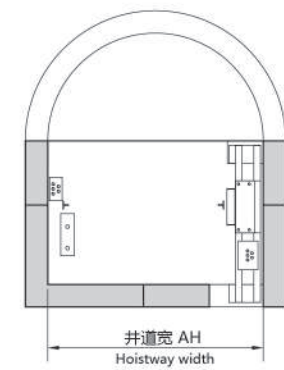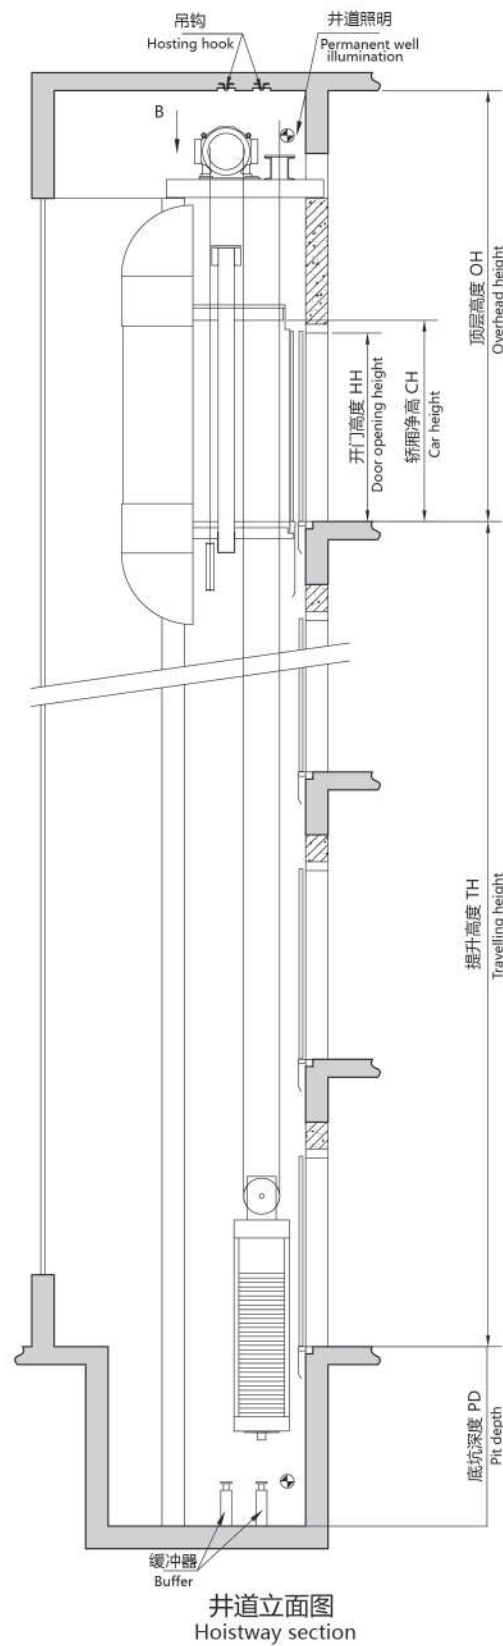

B向
Section B

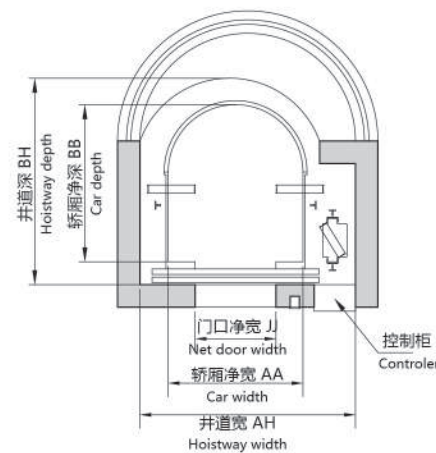

井道布置图
Hoistway plan

KLWG 无机房观光电梯参数表

KLWG Machine roomless panoramic elevator parameter table

载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size			井道尺寸(mm) Hoistway size		顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max. travelling height
				宽 Width	深 Depth	高 Height	宽 Width	深 Depth			
800 (平面)	1.0	800	2100	1300	1600	2250	2200	2200	3950 / 4050	1600	30 / 50
	1.6	800	2100	1300	1600	2250	2200	2200	4100 / 4200	1650	30 / 60
	1.75	800	2100	1300	1600	2250	2200	2200	4150 / 4200	1700	30 / 80
1000 (平面)	1.0	900	2100	1500	1600	2250	2400	2300	3950 / 4050	1600	30 / 50
	1.6	900	2100	1500	1600	2250	2400	2300	4100 / 4200	1650	30 / 60
	1.75	900	2100	1500	1600	2250	2400	2300	4150 / 4200	1700	30 / 80
800 (半圆、菱形)	1.0	800	2100	1300	1680	2250	2200	2200	4000 / 4050	1700	30 / 50
	1.6	800	2100	1300	1680	2250	2200	2200	4150 / 4200	1800	30 / 60
	1.75	800	2100	1300	1680	2250	2200	2200	4200 / 4250	1850	30 / 80
1000 (半圆、菱形)	1.0	900	2100	1500	1750	2250	2400	2300	4100 / 4150	1800	30 / 50
	1.6	900	2100	1500	1750	2250	2400	2300	4250 / 4300	1900	30 / 60
	1.75	900	2100	1500	1750	2250	2400	2300	4300 / 4350	1950	30 / 80
备注 Remarks	轿厢净高 (不含吊顶) Car net height excluding ceiling										30m以下无补偿链配置 Less than 30m uncompensated chain configuration

载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	轿厢外形 Contour of elevator car	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size			井道尺寸(mm) Hoistway size		顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max. travelling height
					宽 Width	深 Depth	高 Height	宽 Width	深 Depth			
1150	1.0	半圆型	900	2100	1400	2050	2250	2450	2600	4150	1750	30
		菱形	1000	2100	1500	1900	2250	2550	2450	4200	1700	30
		平面型	1000	2100	1500	1750	2250	2550	2450	4350	1550	30
		半圆型	900	2100	1400	2050	2250	2450	2600	4450	1750	50
		菱形	1000	2100	1500	1900	2250	2550	2450	4500	1700	50
		平面型	1000	2100	1500	1750	2250	2550	2450	4650	1550	50
	1.6	半圆型	900	2100	1400	2050	2250	2450	2600	4400	1850	30
		菱形	1000	2100	1500	1900	2250	2550	2450	4450	1800	30
		平面型	1000	2100	1500	1750	2250	2550	2450	4600	1650	30
		半圆型	900	2100	1400	2050	2250	2450	2600	4550	1850	60
		菱形	1000	2100	1500	1900	2250	2550	2450	4600	1800	60
		平面型	1000	2100	1500	1750	2250	2550	2450	4750	1650	60
1.75	半圆型	900	2100	1400	2050	2250	2450	2600	4400	1900	30	
	菱形	1000	2100	1500	1900	2250	2550	2450	4450	1850	30	
	平面型	1000	2100	1500	1750	2250	2550	2450	4600	1700	30	
	半圆型	900	2100	1400	2050	2250	2450	2600	4550	1900	80	
	菱形	1000	2100	1500	1900	2250	2550	2450	4600	1850	80	
	平面型	1000	2100	1500	1750	2250	2550	2450	4750	1700	80	
2.0	半圆型	900	2100	1400	2050	2250	2450	2600	4600	1950	95	
	菱形	1000	2100	1500	1900	2250	2550	2450	4650	1900	95	
	平面型	1000	2100	1500	1750	2250	2550	2450	4800	1750	95	
备注 Remarks	轿厢净高 (不含吊顶) Car net height excluding ceiling										30m以下无补偿链配置 Less than 30m uncompensated chain configuration	

KLWG 无机房观光电梯参数表

KLWG Machine roomless panoramic elevator parameter table

载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	轿厢外形 Contour of elevator car	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size			井道尺寸(mm) Hoistway size		顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max.travelling height
					宽 Width	深 Depth	高 Height	宽 Width	深 Depth			
1250	1.0	半圆型	900	2100	1400	2150	2250	2450	2700	4150	1750	30
		菱形	1000		1500	2000		2550	2550	4200	1700	
		平面型	1000		1500	1850		2550	2550	4350	1550	
		半圆型	900		1400	2150		2450	2700	4450	1750	
		菱形	1000		1500	2000		2550	2550	4500	1700	
		平面型	1000		1500	1850		2550	2550	4650	1550	
	1.6	半圆型	900	2100	1400	2150	2250	2450	2700	4400	1850	30
		菱形	1000		1500	2000		2550	2550	4450	1800	
		平面型	1000		1500	1850		2550	2550	4600	1650	
		半圆型	900		1400	2150		2450	2700	4550	1850	
		菱形	1000		1500	2000		2550	2550	4600	1800	
		平面型	1000		1500	1850		2550	2550	4750	1650	
1.75	半圆型	900	2100	1400	2150	2250	2450	2700	4400	1900	30	
	菱形	1000		1500	2000		2550	2550	4450	1850		
	平面型	1000		1500	1850		2550	2550	4600	1700		
	半圆型	900		1400	2150		2450	2700	4550	1900		
	菱形	1000		1500	2000		2550	2550	4600	1850		
	平面型	1000		1500	1850		2550	2550	4750	1700		
2.0	半圆型	900	2100	1400	2150	2250	2450	2700	4600	1950	80	
	菱形	1000		1500	2000		2550	2550	4650	1900		
	平面型	1000		1500	1850		2550	2550	4800	1750		
1350	1.0	半圆型		1000	1500	2150	2250	2550	2700	4100	1800	30
		菱形			1500	2000		2550	2700	4200	1700	
		平面型			1500	2000		2550	2700	4350	1550	
		半圆型			1500	2150		2550	2700	4400	1800	
		菱形			1500	2000		2550	2700	4500	1700	
		平面型			1500	2000		2550	2700	4650	1550	
	1.6	半圆型		1000	1500	2150	2250	2550	2700	4350	1900	30
		菱形			1500	2000		2550	2700	4450	1800	
		平面型			1500	2000		2550	2700	4600	1650	
		半圆型			1500	2150		2550	2700	4500	1900	
		菱形			1500	2000		2550	2700	4600	1800	
		平面型			1500	2000		2550	2700	4750	1650	
1.75	半圆型		1000	1500	2150	2250	2550	2700	4350	1950	30	
	菱形			1500	2000		2550	2700	4450	1850		
	平面型			1500	2000		2550	2700	4600	1700		
	半圆型			1500	2150		2550	2700	4500	1950		
	菱形			1500	2000		2550	2700	4600	1850		
	平面型			1500	2000		2550	2700	4750	1700		
2.0	半圆型		1000	1500	2150	2250	2550	2700	4550	2000	80	
	菱形			1500	2150		2550	2700	4650	1900		
	平面型			1500	2000		2550	2700	4800	1750		
1600	1.0	半圆型	1000	2100	1600	2300	2250	2650	2850	4150	1850	30
		菱形	1100		1700	2150		2750	2700	4200	1700	
		平面型	1100		1700	2000		2750	2700	4350	1550	
		半圆型	1000		1600	2300		2650	2850	4350	1850	
		菱形	1100		1700	2150		2750	2700	4500	1700	
		平面型	1100		1700	2000		2750	2700	4650	1550	
	1.6	半圆型	1000	2100	1600	2300	2250	2650	2850	4300	1950	30
		菱形	1100		1700	2150		2750	2700	4450	1800	
		平面型	1100		1700	2000		2750	2700	4600	1650	
		半圆型	1000		1600	2300		2650	2850	4450	1950	
		菱形	1100		1700	2150		2750	2700	4600	1800	
		平面型	1100		1700	2000		2750	2700	4750	1700	
1.75	半圆型	1000	2100	1600	2300	2250	2650	2850	4450	2000	30	
	菱形	1100		1700	2150		2750	2700	4600	1850		
	平面型	1100		1700	2000		2750	2700	4750	1700		
	半圆型	1000		1600	2300		2650	2850	4500	2000		
	菱形	1100		1700	2150		2750	2700	4650	1850		
	平面型	1100		1700	2000		2750	2700	4800	1700		
2.0	半圆型	1000	2100	1600	2300	2250	2650	2850	4500	2050	80	
	菱形	1100		1700	2150		2750	2700	4650	1900		
	平面型	1100		1700	2000		2750	2700	4800	1750		

备注
Remarks

轿厢净高
(不含吊顶)
Car net height excluding ceiling

30m以下无补偿链配置
Less than 30m uncompensated
chain configuration

KLWG (四面观光类) 无机房观光电梯参数表

KLWG (All-round panorama) machine roomless panorama elevator parameter table

载重量 (Kg) Loading capacity	额定速度 (m/s) Rated speed	开门宽度 (mm) Door opening width	开门高度 (mm) Door opening height	轿厢尺寸(mm) Car size			井道尺寸(mm) Hoistway size		顶层高度 (mm) Top floor height	底坑深度 (mm) Pit depth	最大提升高度 (m) Max.travelling height
				宽 Width	深 Depth	高 Height	宽 Width	深 Depth			
630	1.0	800	2100	1100	1400	2250	2000	1850	4200 / 4250	1350	30 / 50
	1.6			4350 / 4400	1450	30 / 60					
	1.75			4400 / 4450	1500	30 / 80					
800	1.0	800	2100	1300	1400	2250	2100	1850	4200 / 4250	1350	30 / 50
	1.6			4350 / 4400	1450	30 / 60					
	1.75			4400 / 4450	1500	30 / 80					
1000	1.0	900	2100	1500	1500	2250	2300	1950	4200 / 4250	1350	30 / 50
	1.6			4350 / 4400	1450	30 / 60					
	1.75			4400 / 4450	1500	30 / 80					
1150	1.0	1000	2100	1600	1600	2250	2450	2050	4200 / 4250	1350	30 / 50
	1.6			4350 / 4400	1450	30 / 60					
	1.75			4400 / 4450	1500	30 / 80					
1250	1.0	900	2100	1400	2000	2350	2400	2550	4100 / 4400	1550	30 / 50
	1.6			4350 / 4500	1650	30 / 60					
	1.75			4500 / 4550	1700	30 / 80					
1250(贵)	2.0	900	2100	1400	2000	2350	2400	2550	4550	1750	95
	1.0			4100 / 4400	1550	30 / 50					
	1.6			4350 / 4500	1650	30 / 60					
1350	1.0	1000	2100	1500	2000	2350	2500	2550	4500 / 4550	1700	30 / 80
	1.6			4350 / 4500	1650	30 / 60					
	1.75			4500 / 4550	1700	30 / 80					
1350(贵)	2.0	1000	2100	1500	2000	2350	2500	2550	4550	1750	95
	1.0			4100 / 4400	1550	30 / 50					
	1.6			4350 / 4500	1650	30 / 60					
1600	1.0	1100	2100	1700	2000	2350	2700	2550	4100V4400	1550	30 / 50
	1.6			4350 / 4500	1650	30 / 60					
	1.75			4500 / 4550	1700	30 / 80					
1600(贵)	2.0	1100	2100	1700	2000	2350	2700	2550	4550	1750	95
	1.0			4100 / 4400	1550	30 / 50					
	1.6			4350 / 4500	1650	30 / 60					
1600V4550	1.0	1100	2100	1700	2000	2350	2700	2550	4500V4550	1700	30 / 80
	1.6			4350 / 4500	1650	30 / 60					
	1.75			4500V4550	1700	30 / 80					
1600V4550	2.0	1100	2100	1700	2000	2350	2700	2550	4550	1750	95
	1.0			4100 / 4400	1550	30 / 50					
	1.6			4350 / 4500	1650	30 / 60					

备注
Remarks

轿厢净高
(不含吊顶)
Car net height excluding ceiling

30m以下无补偿链配置
Less than 30m uncompensated
chain configuration

全国分公司服务网络 National Branch Service Network

辽宁分公司

销售热线: 024-31981333 传真: 024-31981222
地址: 沈阳市大东区滂江街26-1国际公寓2916

大连分公司

销售热线: 0411-86552277 传真: 0411-86552299
地址: 大连市中山区民康街15号报业大厦16层E

盘锦分公司

销售热线: 0427-2828611 传真: 0427-2829611
地址: 辽宁省盘锦市兴隆台区大商新玛特C座2102室

黑龙江分公司

销售热线: 0451-82346098 传真: 0451-82318292
地址: 黑龙江省哈尔滨市道里区群力第四大道399号汇智广场西楼1004室

吉林分公司

销售热线: 0431-86770000 传真: 0431-81030300
地址: 长春市经济技术开发区临河街5445号圣豪汇商705室

北京分公司

销售热线: 010-65505559 传真: 010-65505562
地址: 北京市朝阳区八里庄西里97号住邦2000商务中心4号楼10层

内蒙古分公司

销售热线: 0471-6289116 传真: 0471-6922767
地址: 呼和浩特市回民区新华西街明泽广场A座21层2110室

河北分公司

销售热线: 0311-66792031 转 8002 传真: 0311-87893130
地址: 石家庄市建设南大街29号众鑫大厦818-820室

天津分公司

销售热线: 022-58306090 传真: 022-58306091
地址: 天津市红桥区光荣道与保康路交口宝能创业中心B座24层2412室

山西分公司

销售热线: 0351-8371869 传真: 0351-8371859
地址: 太原市小店区平阳路1号金茂国际数码中心A座16层F室

陕西分公司

销售热线: 029-88332244 传真: 029-88332244-831
地址: 西安市莲湖区唐延路北段22号金辉国际广场11层

甘肃分公司

销售热线: 0931-8811752 传真: 0931-8432645
地址: 甘肃省兰州市城关区澳兰名门B2座708室

新疆分公司

销售热线: 0991-4815313 传真: 0991-4815795-815
地址: 新疆乌鲁木齐沙依巴克区友好北路793号高地中心1105室

河南分公司

销售热线: 0371-60189221
地址: 郑州市郑东新区康平路永平路郑东商业中心写字楼一号楼17楼1707

山东分公司

销售热线: 0531-55693961 传真: 0531-55693965
地址: 济南市市中区经四路13号万达广场C座办公楼2606室

青岛分公司

销售热线: 0532-68890088 传真: 0532-89092106
地址: 青岛市市北区山东路177号鲁邦广场B座1106-1107

烟台分公司

销售热线: 0535-6887005 传真: 0535-6887005
地址: 山东省烟台市莱山区银海路566号南山世纪华府13-2-2802

南京分公司

销售热线: 025-58812988 传真: 025-84519155-81
地址: 南京市洪武路359号福鑫大厦西2602室

苏州分公司

销售热线: 0512-65166725 传真: 0512-65166721
地址: 苏州工业园区苏虹中路225号星虹国际1幢2113室

无锡分公司

销售热线: 0510-85861251 传真: 0510-85861252
地址: 无锡市滨湖区梁青路58号华邸国际大厦A座1501室

徐州分公司

销售热线: 0516-83919000 传真: 0516-83919005
地址: 徐州市庆丰路绿地城市广场瀛海写字楼A座706室

上海分公司

销售热线: 021-62828058/62827558 传真: 021-62828360
地址: 上海市延安西路1221号2203室

浙江分公司

销售热线: 0571-89971040 传真: 0571-86590365
地址: 杭州市新塘路19号采荷嘉业5幢1204室

安徽分公司

销售热线: 0551-62671797 传真: 0551-62313639
地址: 安徽省合肥市蜀山区望江西路69号西湖国际广场A座603室

芜湖分公司

销售热线: 0553-3856158
地址: 芜湖市镜湖区长江中路66号 徽商财富广场北楼1802室

江西分公司

销售热线: 0791-88223016 传真: 0791-88399056
地址: 南昌市高新开发区紫阳大道绿地新都会紫峰(幢)大厦写字楼34层3402室

湖北分公司

销售热线: 027-82660063 传真: 027-85770699
地址: 武汉市江汉区淮海路中段泛海国际SOHO城2605-2606室

襄阳分公司

销售热线: 0710-3287220 传真: 0710-3287220
地址: 襄阳市高新区长虹北路万达小区1栋二单元1902室

湖南分公司

销售热线: 0731-85787755 传真: 0731-85787722
地址: 长沙市岳麓区岳麓大道57号奥克斯广场B座1127-1129

重庆分公司

销售热线: 023-67877015 传真: 023-67877025
地址: 重庆市渝中区大坪正街160号万科锦程1栋26-6

四川分公司

销售热线: 028-61320037 传真: 028-87321179
地址: 四川省成都市高新区新世纪环球中心西区8-1-1707

云南分公司

销售热线: 0871-68355199 传真: 0871-68355299
地址: 云南省昆明市五华区人民中路36号如意大厦11A室

贵州分公司

销售热线: 0851-86515286 传真: 0851-86515286转81
地址: 贵阳市观山湖区金阳南路6号世纪城购物中心D栋写字楼23层5号

广西分公司

销售热线: 0771-5517626 传真: 0771-5505713
地址: 南宁市民族大道92-1号新城国际1401号

广东分公司

销售热线: 020-38021060 传真: 020-38021410
地址: 广州市天河区天河路625号天娱广场东塔1007-1008室

深圳分公司

销售热线: 0755-83865618 传真: 0755-83865618
地址: 深圳市福田区益田路3008号皇都广场A座1906室

珠海分公司

销售热线: 0756-2260550 传真: 0756-2260695
地址: 珠海市香洲区银桦路102号6栋优特科技大厦909室

福建分公司

销售热线: 0591-88596982 传真: 0591-88594630
地址: 福州市五一中路88号平安大厦21G



用户应完成的工作

- 1、本图按有关电梯技术标准要求绘制，需复核后作为电梯安装依据。
- 2、机房内通向井道的所有孔洞四周应筑一高50mm以上，宽度适当的台阶。
- 3、曳引机承重梁如需埋入墙内，则支承长度应超过墙中心20mm，且不应小于75mm。
- 4、安装完成后，地面装饰应与厅门地坎上表面有一高度适当的台阶，以防止水或其它杂物进入井道。
- 5、安装时浇灌的物体应能满足相关图示要求。
- 6、缓冲器底座制作时应在安装人员的指导下施工。

The user's tasks

1. It makes the drawing according to the relevant lift technical standard, It needs to be checked and confirmed by the user before it becomes the lift installation proof.
2. It shall have one above 50mm step with the proper width around the holes that lead to the well in side the machine room.
3. It shall be embedded in the wall for the machine supporting beam of the traction machine, Then the supporting length shall be 20mm more than the wall center, It shall not be less than 75mm.
4. After the installation completion, the ground decoration shall have a proper height step in the sill surface to prevent water or other impurity from entering into the well.
5. The casting object in the installation shall satisfy the relevant drawing requirements.
6. The buffer base shall be made under the directions of the installers.