



扫描二维码
关注康力电梯门户网站
Scan the QR code and pay attention to
CANNY ELEVATOR Portal Website.



扫描二维码
关注康力电梯微信公众号
Scan the QR code and pay attention to
CANNY ELEVATOR WeChat Public Number

康力电梯股份有限公司 CANNY ELEVATOR CO.,LTD.

- ◎地址：江苏省汾湖高新技术产业开发区康力大道888号
- ◎电话：0512-63290000
- ◎传真：0512-63293938
- ◎网址：www.canny-elevator.com
- ◎电子信箱：(国内) marketing@canny-elevator.com
(国外) export-canny@163.com
export@canny-elevator.com
- ◎400客户服务热线：400-188-2367
- ◎邮编：215213

本书为一般信息类出版物，我们保留随时更改产品设计和说明的权利，所有图片和颜色可能与实物有所不同，请以实物为准。
康力电梯股份有限公司 © 版权所有 2016-V1.0版



KLK1
银燕系列乘客电梯
KLK1 PASSENGER ELEVATOR



以人为本 从心出发

Being People-oriented, Starting from The Heart

以人为本，融汇现代科技之灵性，
采用最新电梯制造技术，
成就了电梯的高实用性和高性价比，
可全面满足建筑不同尺度、不同个性的空间需求和生活主张。

Being people-oriented, it adopts intelligent modern technology,
Uses the latest elevator manufacturing technology,
Achieves high availability and high cost-efficiency of elevator,
Can fully meet various space requirements of buildings at different scales and different lifestyles.



住宅




写字楼



酒店

康力银燕系列乘客电梯

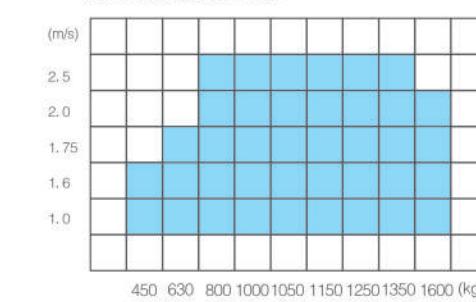

人性空间 • 至善至美

User-friendly Space, Pursuit of Perfection



新一代永磁同步无齿轮曳引机

- ◆ 高精度密封轴承，转矩更大，效率更高
- ◆ 同轴传动技术，节能达30%以上
- ◆ 无需更换润滑油，减少油污污染
- ◆ 消除了传统传动引起的噪音和振动，安静平稳

A new generation of permanent magnet synchronous gearless traction machine

High precision sealed bearing, with greater torque and higher efficiency.
Technology, which saves more than 30% of energies. Coaxial transmission.
No need to replace the lubricant, which reduces oil contamination.
Eliminate the noise and vibration caused by traditional transmission, which helps realize quietness and smoothness.



节省空间

采用康力为身定制的紧凑型控制柜和永磁同步曳引机，有效节省井道空间，提高建筑空间利用率。

节能低耗

LED灯使用寿命长，耗电量少，灯光更柔和，电能只为白炽灯的五分之一。

自动唤醒

当固定时间内无人唤梯时，轿厢内照明及风扇将自动关闭，当有乘客召唤时，设备将自动启动，节省电梯非运行时间耗费的能源。

LED灯	80W普通荧光灯
LED spotlight	80W ordinary fluorescent lamp
平均照度	80lx About 80lx
寿命	约6千小时 About 6000 hours
Life	约3万小时 About 30000 hours
耗电量	约80W About 80W
Power consumption	约15W About 15W
废弃物	有 Yes
Discard	无 No

Space Saving


The adoption of the compact control cabinet and the permanent magnet synchronous traction machine customized for CANNY saves the space of the hoistway and improves the utilization of the construction space.

Energy Saving and Low Consumption

The LED light has the advantages of long service life, and low energy cost with softer lighting; besides, the electricity consumed is just one fifth of that consumed by incandescent light bulb.

Automatic waking device

When nobody calls for the elevator in a fixed time period, the light and the fan in the car will automatically shut off; When someone calls, the device will automatically start, saving energy during the standing time.

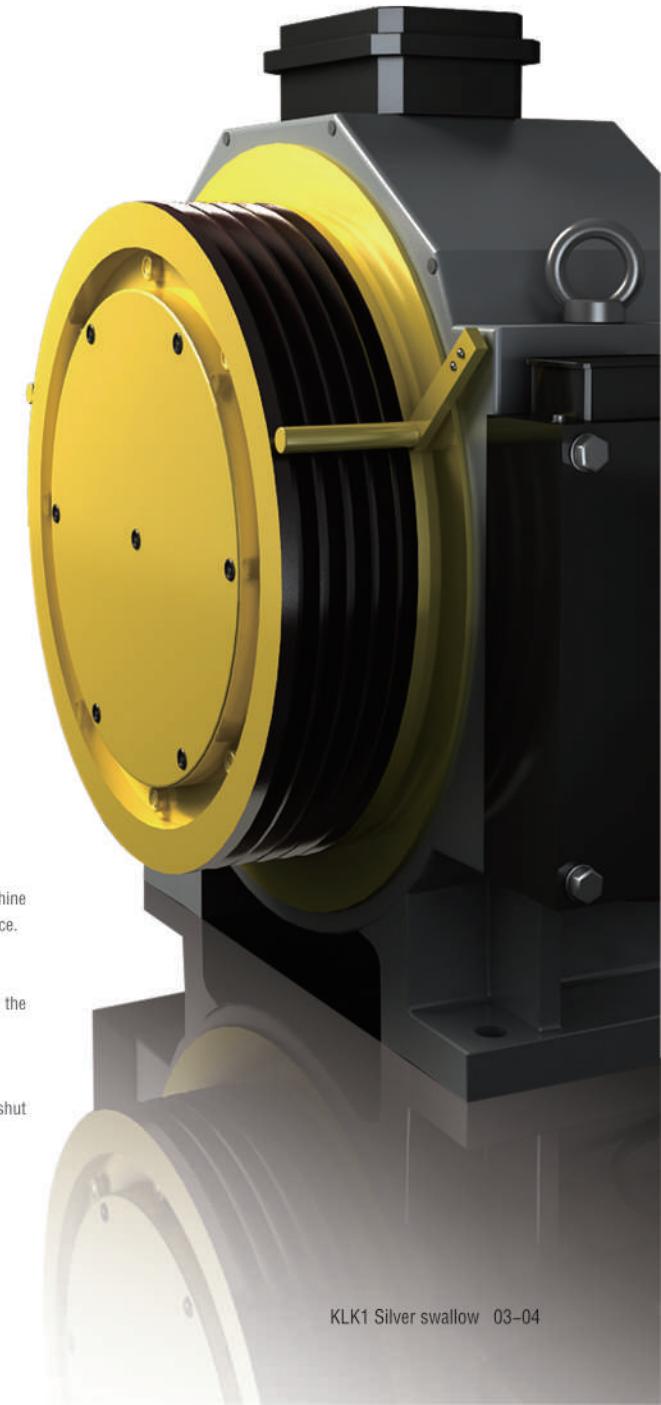



人性科技·创享安全 User-friendly technology · safe and reliable

- ◆ 抱闸力自检测及监视功能
主动定期测试抱闸力，通过提示故障及禁止电梯运行等方式，防止严重事故发生。
- ◆ 牵引绳滑动检测
实时监测滑动数据并且根据需要自动进入应急减速的安全运行模式。
- ◆ 光幕安全网
对于进入其探测区域的人或物做出灵敏反应，设计更体贴，保护更周到。

Braking Force Self-Detecting and Monitoring Function


It can test the braking force regularly, and prevent serious accidents from happening by prompting failure and stopping elevator from running.

Traction Rope Slide Detection

It provides real-time monitoring of sliding data, and can automatically enter the safe operation mode for emergency according to requirements.

Safety Light Curtain

It can make a sensitive response to people or objects in the detection area, the design is more thoughtful, and provides more thoughtful protection.

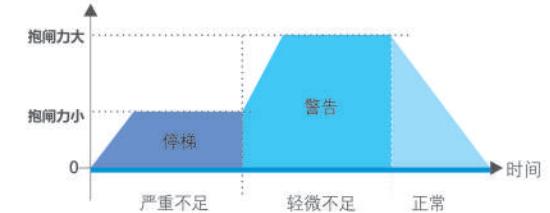

先进的红外光幕传感器
Advanced Infrared Light Curtain Sensor

领先升级·全新一代控制系统 New generation of control system, Leading upgrade

- ◆ 双32位高性能ARM芯片，可实现容错和监测功能，提高了系统的可靠性；
- ◆ 采用四层板表贴工艺，CAN总线串行通讯，保证了大量数据的高速、可靠传送；
- ◆ 超强的故障自诊与记录功能，确保电梯效率和安全；
- ◆ 采用分级密码进行参数设置，安全可靠，还可故障记录查询等操作，便于维修与调试。



ARM
32位高性能芯片



CAN
串行通讯

Double 32-bit high-performance ARM chip can achieve fault tolerance and monitoring function, improving the reliability of the system.
Four-layer board surface mount technology and CAN bus serial communication are adopted to ensure the high-speed, reliable transmission of mass data;
Super fault-diagnosis and fault recording function ensure the efficiency and safety of elevator;
Grading password is adopted for parameter setting, it is safe and reliable, and can inquire fault records, making maintenance and commissioning much easier.

人性关怀·平稳舒适 User-friendly · Smooth and Comfortable

- ◆ 变频门机系统
具备高效自学能力的门负载检测器，开关门速度可自由调节，使系统运行舒适平稳。
- ◆ 新一代VVVF变频器
可根据轿厢负载，调整电流大小和相位，精确控制主机转动力矩，确保电梯稳定运行。

Frequency conversion door system

Equipped with effective door load detector capable of self-learning, the speed of door opening and closing can be freely adjusted, making the whole system run comfortably and smoothly.

New generation of VVVF Inverter

Capable of the adjustment of current magnitude and phase and the precise control of driving torque of main engine, so as to ensure the stable running of elevator.





尊崇之道·随心而选 Intelligent Technology, Choice of Heart

IC卡智能管理系统(可选)

轿厢内IC卡智能设置系统:采用IC卡智能识别系统,乘客进入轿厢内便可实现刷卡到户的快捷之旅。


IC card intelligent management (Optional)

The renewable energy into electrical energy back to the local power grid use, energy consumptionisreducedby30%.

- 1.呼梯 2.入口楼层读取
- 3.进入轿厢 4.轿内选择权限楼层

可选择任一平层,无需按钮自动到达所住楼层。

- 1. Call 2.Read card at entrance floor
- 3. Select Floor No. in the elevator car 4. Enter the elevator car
- Each floor can be selected for leveling, without pressing any button, it will automatically reach the designated floor of user.

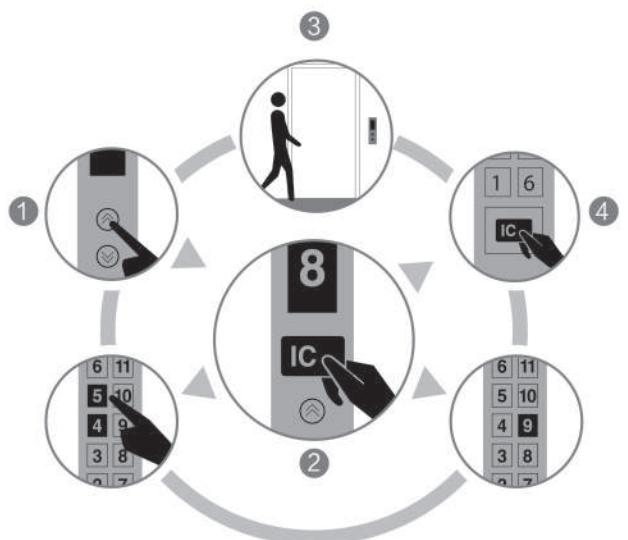


群控智能派梯系统(可选)

运用智能分散待梯原则,以最快速度、最高效率运载乘客。

Group controlling intelligent dispatching system (Optional)

Abiding by the principle of intelligent dispersed principle, carry passengers with highest speedandefficiency

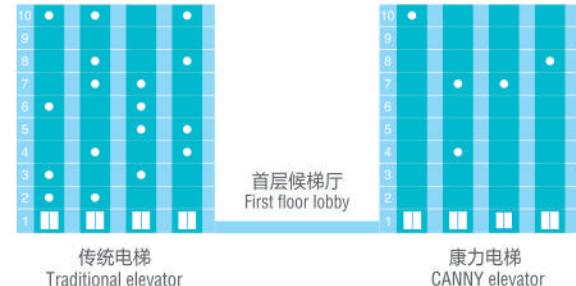


停电应急平层功能(可选)

电网停电后由电梯自动应急平层装置供电运行至最近层站平层开门。

Leveling for power failure (Optional)

After the outage by elevator automatic emergency power leveling device running to the nearest landingdoor leveling.

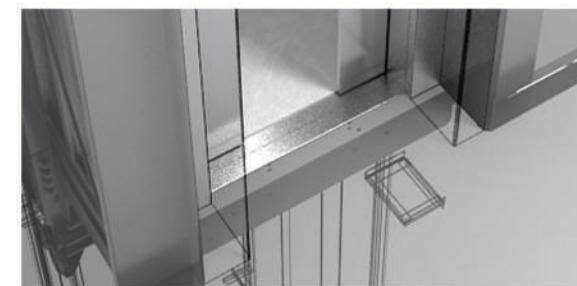


“赛能”能量回馈再生技术(可选)

将再生能源转化成电能回馈给局域电网使用,能耗降低30%。

CANEN energy re-generation feedback technology (optional)

The renewable energy into electrical energy back to the local power grid use, energy consumptionisreducedby30%.

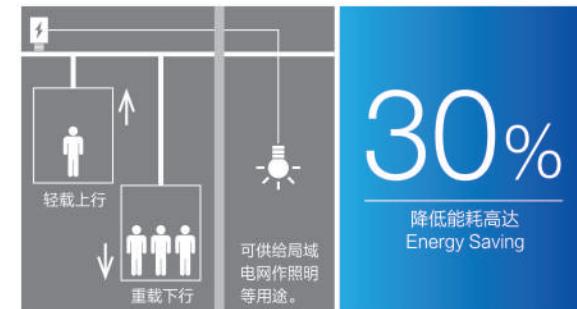

更多可选功能

More optional function



远程监控
Long-distance monitor



提前开门功能
Door opening in advance



BAS楼宇监控
Building Automation System



防捣乱功能
Anti-nuisance

标准型设计

Standard Design

王者风范 KL/K4-2001

标配 Standard configuration

轿壁: 发纹不锈钢 前壁: 发纹不锈钢
立柱: 发纹不锈钢 操纵壁: KL231C一体式操纵箱, 发纹不锈钢
轿门: 发纹不锈钢 地板: KL/JD-4004 (PVC) 踢脚线: 发纹不锈钢



Car wall: Hairline stainless steel Front wall: Hairline stainless steel
Vertical column: Hairline stainless steel Operation panel: KL231C, Hairline stainless steel
Car door: Hairline stainless steel Floor: KL/JD-4004 (PVC) Skirting: Hairline stainless steel



扫描二维码360度了解轿厢
Scan the QR code to know more about the lift car in the 360-degree manner.


时尚节能

舒适温馨的同时享受不同的空间体验

Fashionable and Energy-saving

Comfortable and Providing different spatial experiences

Silver Swallow Passenger Elevator 银燕乘客电梯·装潢设计

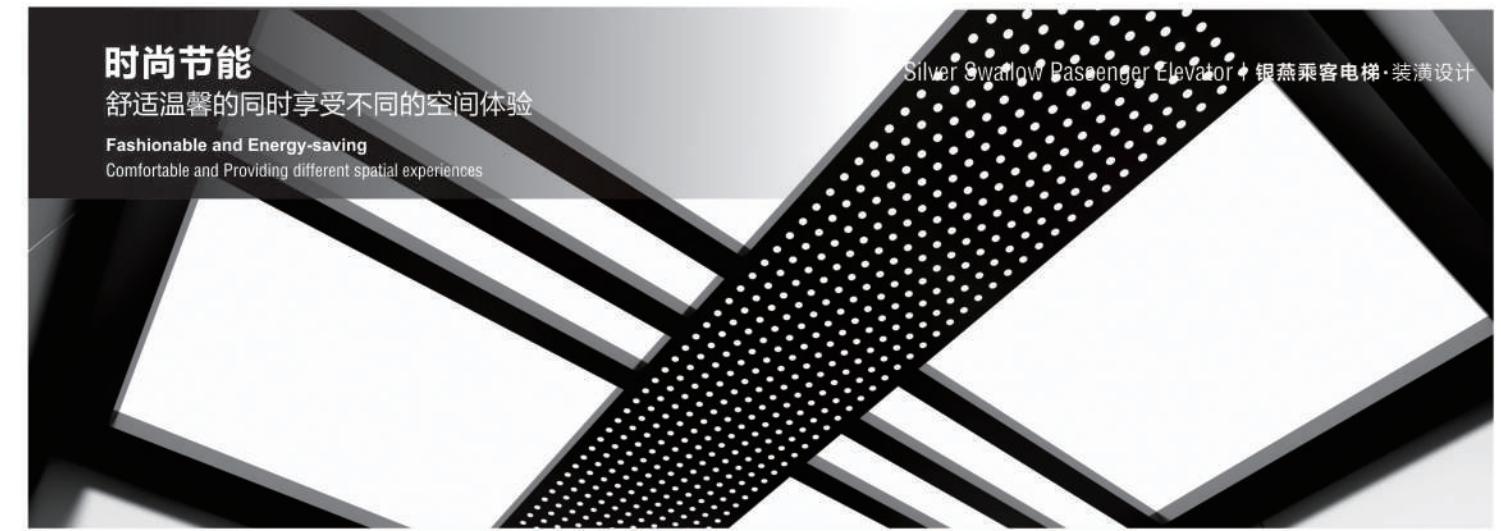

完美配置

与高品质面板完美组合, 整个轿厢清新素雅, 气质内敛。

Perfect configuration

It matches perfectly with high-quality panel, making the entire car fresh and elegant, with restrained temperament.



细节考究

整体式不锈钢包边, 干净、整洁、易维护

Exquisite Details

The integrated stainless steel tipping, clean, tidy and easy for maintenance.



美观实用

具有较强的耐磨性质, 防滑、防潮易保养

Beautiful and Practical

It has strong wear resistance properties, it is anti-skidding, moisture-proof and easy for maintenance.






友谊长存 KL/K4-2002

(有偿选配 Charged optional)

吊顶: KL/DD-4005, 喷粉钢板, 亚克力, LED光源
 轿壁: 钛金镜面蚀刻(中间), 贴塑钢板(两侧)
 前壁: 钛金发纹不锈钢 立柱: 钛金发纹不锈钢
 操纵箱: KL231C一体式操纵箱, 钛金发纹不锈钢
 地坪: KL/JD-4005(PVC) 轿门: 钛金发纹不锈钢
 踢脚线: 钛金发纹不锈钢

Ceiling: KL/DD-4005, Dusting steel plate, acrylic, LED light source
 Car wall: Titanium gold mirror etched (Middle) Model steel placed (Both side)
 Front wall: Titanium gold hairline stainless steel
 Vertical column: Titanium gold hairline stainless steel
 Operation panel: KL231C Titanium gold hairline stainless steel
 Floor: KL/JD-4005 (PVC) Car door: Titanium gold hairline stainless steel
 Skirting: Titanium gold hairline stainless steel

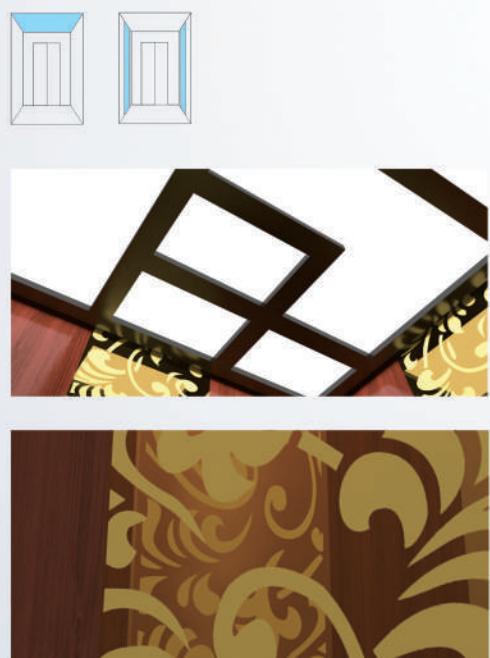

扫描二维码360度了解轿厢
 Scan the QR code to know more about the lift car
 in the 360-degree manner



林海雪原 KL/K4-2003


(有偿选配 Charged optional)

吊顶: KL/DD-4006, 喷粉钢板, 亚克力, LED光源
 轿壁: 镜面蚀刻(中间) 贴塑钢板(两侧)
 前壁: 镜面不锈钢 立柱: 镜面不锈钢
 操纵箱: KL241C一体式操纵箱, 镜面不锈钢
 轿门: 镜面不锈钢 地坪: KL/JD-4006(PVC)
 踢脚线: 发纹不锈钢

Ceiling: KL/DD-4006, Dusting steel plate, acrylic, LED light source
 Car wall: Mirror etched (Middle) Model steel placed (Both side)
 Front wall: Mirror stainless steel
 Vertical column: Mirror stainless steel
 Operation panel: KL241C Mirror stainless steel
 Car door: Mirror stainless steel
 Floor: KL/JD-4006 (PVC)
 Skirting: Hairline stainless steel



扫描二维码360度了解轿厢
 Scan the QR code to know more about the lift car
 in the 360-degree manner

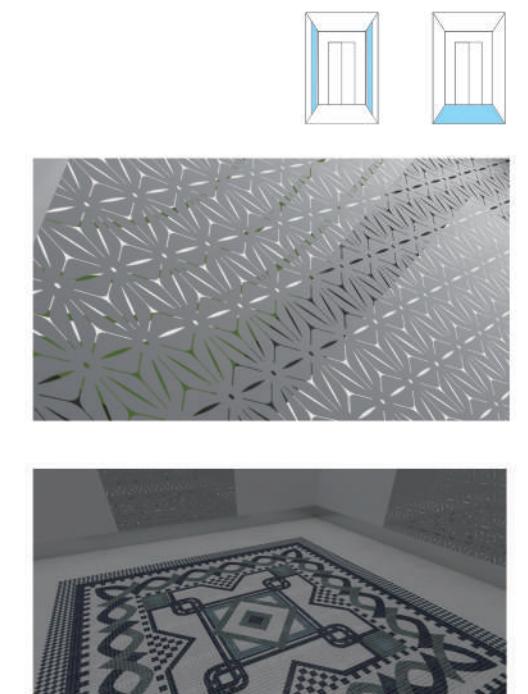



KL/K4-2001S-1

(深轿厢标准配置 Standard configuration)

吊顶: KL/DD-4004, 喷粉钢板, 中撑小圆孔, LED光源

轿壁/前壁: 发纹不锈钢 立柱: 发纹不锈钢

操纵箱: KL231C一体式操纵箱(前壁), 发纹不锈钢

轿门: 发纹不锈钢 地板: KL/JD-4004(PVC)

踢脚线: 发纹不锈钢

Ceiling: KL/DD-4004, Dusting steel plate, hole on center support, LED light source

Car wall: Hairline stainless steel

Front wall: Hairline stainless steel


Vertical column: Hairline stainless steel

Operation panel: KL231C (front wall), Hairline stainless steel

Car door: Hairline stainless steel

Floor: KL/JD-4004 (PVC)

Skirting: Hairline stainless steel

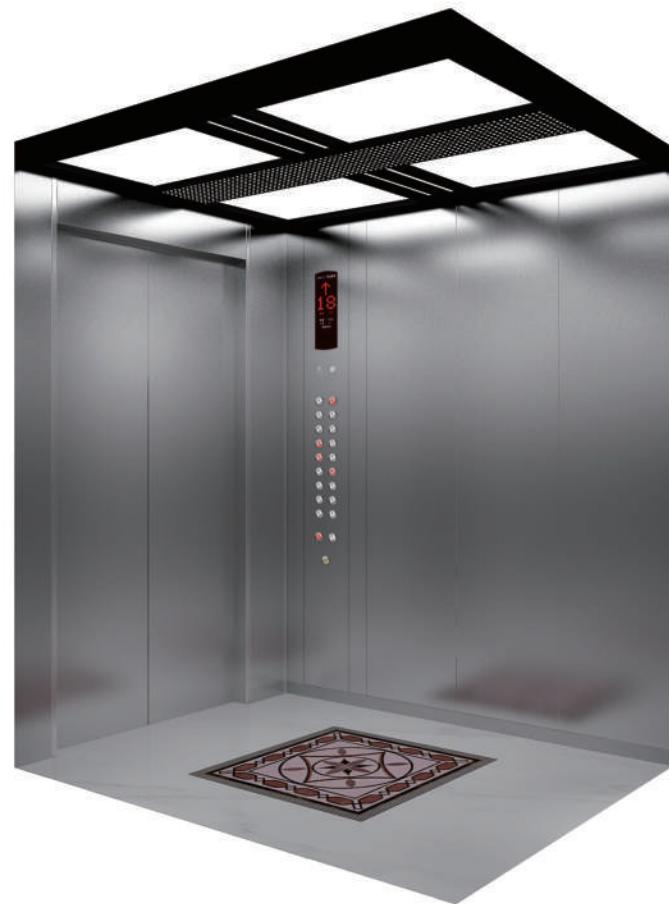

KL/K4-2001S-2

(深轿厢标准配置 Standard configuration)

吊顶: KL/DD-4004, 喷粉钢板, 中撑小圆孔, LED光源

轿壁/前壁: 发纹不锈钢 立柱: 发纹不锈钢

操纵壁: KL231C一体式操纵箱(侧壁),发纹不锈钢

轿门: 发纹不锈钢 地板: KL/JD-4004(PVC)

踢脚线: 发纹不锈钢

Ceiling: KL/DD-4004, Dusting steel plate, hole on center support, LED light source

Car wall: Hairline stainless steel Front wall: Hairline stainless steel

Vertical column: Hairline stainless steel

Operation panel: KL231C (side wall)

Car door: Hairline stainless steel

Floor: KL/JD-4004 (PVC) Skirting: Hairline stainless steel



整体式美学设计, 与轿壁自成一派, 彰显雅致风范

Integrated aesthetic design matches the car wall as one, highlighting the elegant demeanor



显示屏

点阵显示屏

停层数

2-48停层

Display screen

Liquid crystal display

Parking number

2-48 stop layer

面板材质: 发纹不锈钢
Panel material: Hairline stainless steel

可选按钮

Button optional



KL231C

标配
Standard



KL232C

无偿选配
Free optional

面板材质: 镜面不锈钢
Panel material : Mirror stainless steel

可选按钮

Button optional



KL241C

有偿选配
Charged optional



KL242C

有偿选配
Charged optional

显示屏

液晶显示屏

停层数

2-48停层

Display screen

Liquid crystal display

Parking number

2-48 stop layer

面板材质: 发纹不锈钢
Panel material: Hairline stainless steel

可选按钮

Button optional



KL233C

有偿选配
Charged optional



KL234C

有偿选配
Charged optional

面板材质: 镜面不锈钢
Panel material : Mirror stainless steel

可选按钮

Button optional



KL243C

有偿选配
Charged optional



KL244C

有偿选配
Charged optional



一体式操纵盘 (有偿选配) Integrated operation panel (charged optional)

面板材质: 发纹不锈钢
Panel material: Hairline stainless steel

可选按钮 Button optional	可选屏幕尺寸 Optional screen size		
KL235C 有偿选配 Charged optional	KL237C 有偿选配 Charged optional	KL239C 有偿选配 Charged optional	
KL236C 有偿选配 Charged optional	KL238C 有偿选配 Charged optional	KL23AC 有偿选配 Charged optional	

面板材质: 镜面不锈钢
Panel material: Mirror stainless steel

可选按钮 Button optional	可选屏幕尺寸 Optional screen size		
KL245C 有偿选配 Charged optional	KL247C 有偿选配 Charged optional	KL249C 有偿选配 Charged optional	
KL246C 有偿选配 Charged optional	KL248C 有偿选配 Charged optional	KL24AC 有偿选配 Charged optional	

嵌入式操纵盘 Embedded Control Panel

嵌入式操纵盘, 满足多样化操纵功能定制, 结构更坚固, 维护更方便。

The imbedded operating panel meets the customization of the diversified control functions, thus making the structure more solid and the maintenance more convenient.



显示屏
点阵显示屏
停层数
2-48停层
Display screen
Dot matrix display screen
Parking number
2-48 stop layer



显示屏
轿内横显
停层数
2-48停层
Display screen
Car indicator
Parking number
2-48 stop layer

↑18
轿内横显
Car indicator

可选按钮
Button optional



面板材质: 镜面不锈钢
Panel material: Mirror stainless steel



轿内横显
Car indicator

可选按钮
Button optional



面板材质: 镜面不锈钢
Panel material: Mirror stainless steel



人机界面 Man-machine interface

感受人性化乘梯体验，多种材质选择，多项功能设置，完美互动一触即发
User friendly transportation experience, optional materials, multiple functions, perfect interaction

无底盒召唤指示器(单梯)

Calling Indicator Without Bottom Box (single elevator)



KL631H

标配 Standard
点阵显示
Dot matrix display

KL632H
无偿选配 Free optional
点阵显示
Dot matrix display




KL633H

有偿选配 Charged optional
液晶显示
Liquid crystal display

KL634H
有偿选配 Charged optional
液晶显示
Liquid crystal display

安装方式对比 Contrast installation

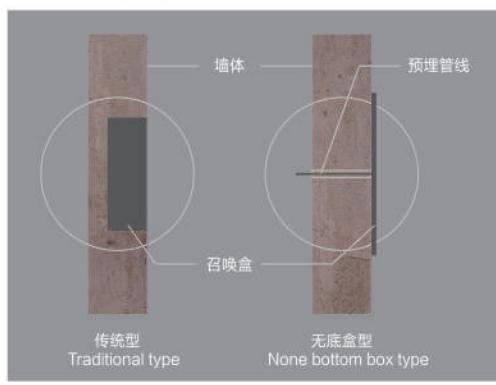

传统型: 土建时需预先留孔, 耗时耗力。
无底盒型: 只需预埋管线, 无需土建留孔, 安装维修更便捷。
Conventional: When leaving holes to be pre-civil, time-consuming and labor-intensive.
Bottomless box type: simply embedded pipeline, without leaving holes civil engineering, installation and maintenance more convenient.

无底盒召唤指示器(双梯)

Calling Indicator Without Bottom Box(Double Elevator)



KL635H

有偿选配 Charged optional
点阵显示
Dot matrix display

KL636H
有偿选配 Charged optional
点阵显示
Dot matrix display



KL637H

有偿选配 Charged optional
液晶显示
Liquid crystal display

KL638H
有偿选配 Charged optional
液晶显示
Liquid crystal display

无底盒消防盒与锁梯盒

Fire Protection Box And Elevator locking box
Without Bottom Case



KL651H

标配 Standard

KL652H

标配 Standard

KL653H

有偿选配 Charged optional

残疾人操纵盘 Operation panel for disabled



KL381CD 有偿选配 Charged optional



KL382CD 有偿选配 Charged optional



KL383CD 有偿选配 Charged optional



KL384CD 有偿选配 Charged optional

可选面板材质: 发纹不锈钢/镜面不锈钢
Panel material: Hairline/Mirror stainless steel

层站横式指示器(无到站灯) 有偿选配



发纹不锈钢 Hairline stainless steel

KL341H KL342H

镜面不锈钢 Mirror stainless steel

KL351H KL352H

显示屏可选尺寸 Optional screen size



发纹不锈钢 Hairline stainless steel

KL343H KL344H KL345H

镜面不锈钢 Mirror stainless steel

KL353H KL354H KL355H

层站横式指示器(带到站灯) 有偿选配



KL365H (发纹不锈钢)
Hairline stainless steel

KL375H (镜面不锈钢)
Mirror stainless steel

KL366H (发纹不锈钢)
Hairline stainless steel

KL376H (镜面不锈钢)
Mirror stainless steel

可选面板材质 Panel material optional



发纹不锈钢
Hairline stainless steel



镜面不锈钢
Mirror stainless steel

人机界面 Man-machine interface

感受人性化乘梯体验，多种材质选择，多项功能设置，完美互动一触即发

User friendly transportation experience, optional materials, multiple functions, perfect interaction



嵌入式层站召唤盒(带层显) Embedded Calling box for landing (with floor display)



层站召唤按钮(无层显) Calling button for landing (without floor display)




层站到站灯 (有偿选配) Arrival lamps for landing (Charged optional)



可选面板材质 Panel material optional




扶手(可选) Handrail (optional)

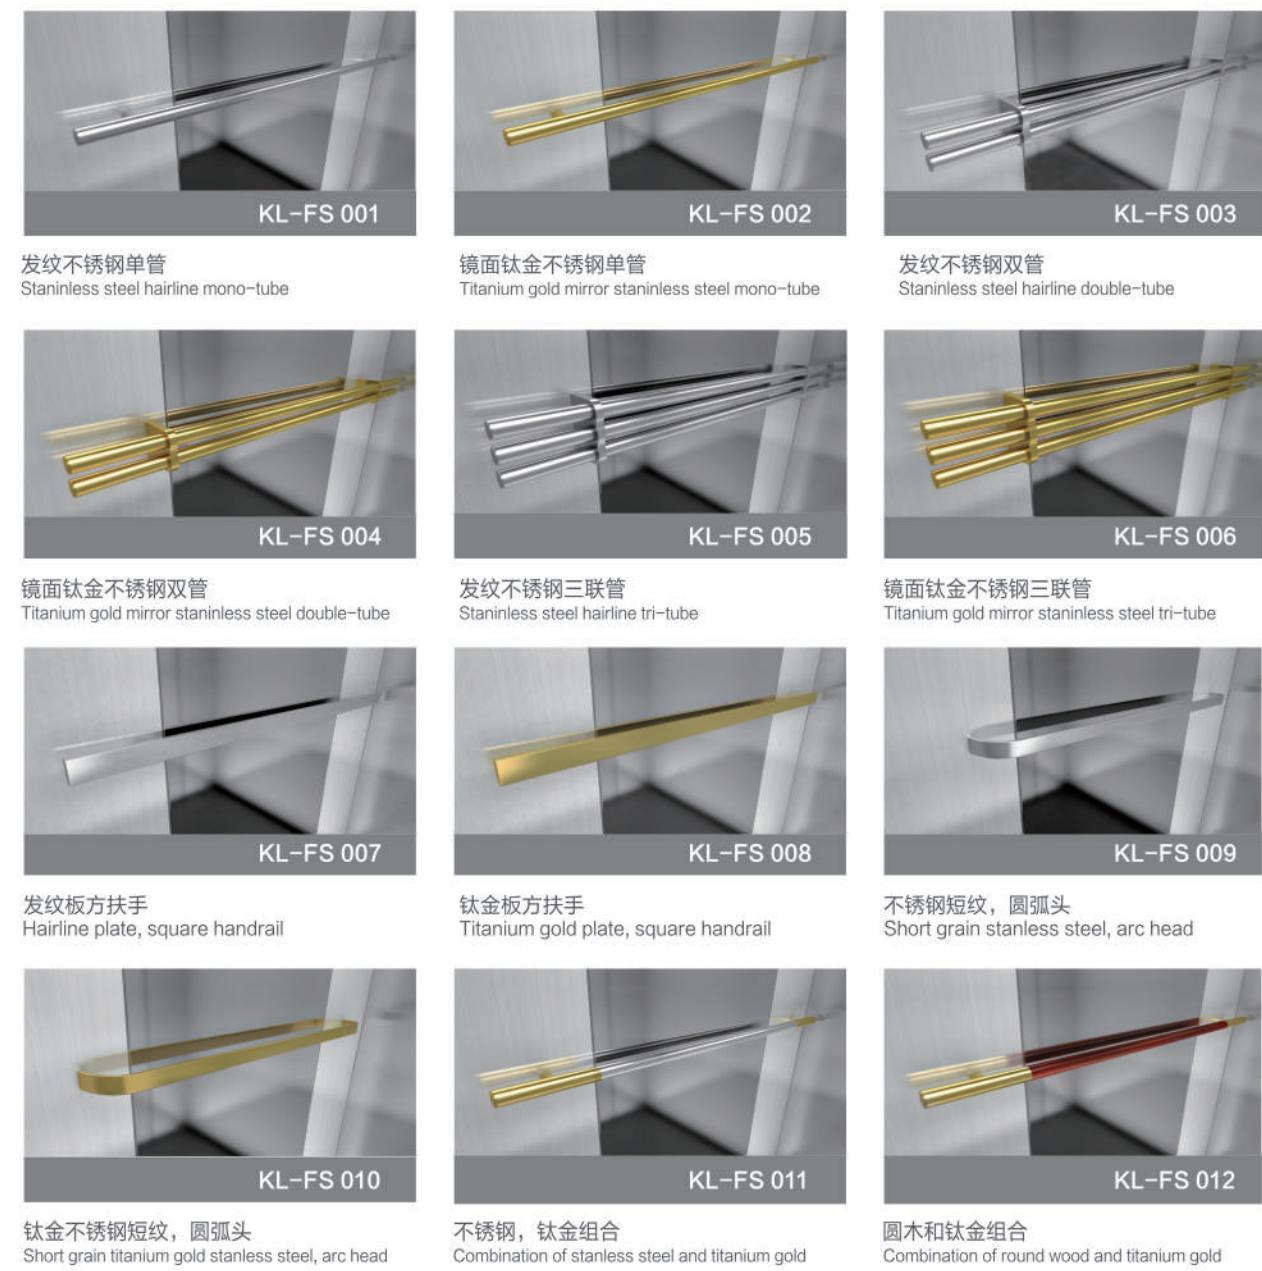



吊顶 Ceiling

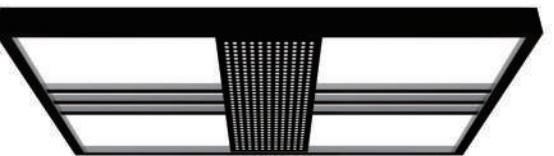

KL/DD-4004 标配 Standard
喷粉钢板, 中撑小圆孔, LED光源
Dusting steel plate, hole on center support, LED light source



KL/DD-4005 无偿选配 Free optional
喷粉钢板, 亚克力, LED光源
Dusting steel plate, acrylic, LED light source




KL/DD-4006 无偿选配 Free optional
喷粉钢板, 亚克力, LED光源
Dusting steel plate, acrylic, LED light source



KL-D 001 无偿选配 Free optional
双拱形白色有机透光板, 中部LED灯的柔光照明设计
Double arched white organic light emitting board plus the gentle light illumination of the mid down light

喷粉色标(可选) Dusting color standard (optional)



KL-SK 001
冰灰 Ice gray



KL-SK 002
飞机灰 Plane gray



KL-SK 003
米黄 Corny yellow



KL-SK 004
卵石灰 Pebble gray



KL-SK 005
群青蓝 Ultramarine blue



KL-SK 006
崧蓝蓝色 Pastel blue



KL-SK 007
浅绿色 Light green



KL-SK 008
淡粉红色 Light pink

PVC地板(可选) PVC Floor (optional)



KL/JD-4004



KL/JD-4005



KL/JD-4006



KL-JD 001



KL-JD 002



KL-JD 005



KL-JD 006



KL-JD 007



KL-JD 008



KL-JD 009

厅门 Landing Door



KL-TM 001 标配 Standard

厅门: 发纹不锈钢
Landing Door: Hairline stainless steel

门套: 发纹不锈钢
Jamb: Hairline stainless steel



KL-TM 002 标配 Standard

厅门: 喷粉钢板
Landing Door: Dusting steel plate

门套: 喷粉钢板
Jamb: Dusting steel plate



KL/M-4013 可选 Optional

厅门: 蚀刻不锈钢
Landing Door: Etched stainless steel

门套: 蚀刻不锈钢
Jamb: Etched stainless steel



KL/M-4033 可选 Optional

厅门: 镜面, 浮雕, 钛黑
Landing Door: Mirror, Relief, Titanium black stainless steel

门套: 镜面不锈钢
Jamb: Mirror stainless steel


蚀刻花纹 (可选) Etching pattern (optional)




KL/ST-4001




KL/ST -4002




KL/ST-4003

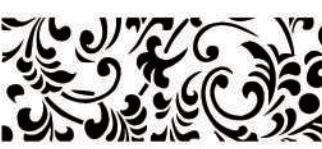


KL/ST-4004



KL/ST-4005



KL/ST-4008



KL/ST-4012

先进功能设计 Advanced functional design

● 标准; ○ 无偿选配; ○ 有偿选配
● Standard ○ Free optional ○ Charged optional


● 抱闸力检测 Braking Force Self-Detecting	主动定期测试抱闸力，通过提示故障及禁止电梯运行等方式，防止严重事故发生。 Actively and regularly test the brake force; prevent more serious accident by means of malfunction indication and running prohibition and so on.
● 异引绳滑动检测 Traction Rope Slide Detection	实时监测滑动数据并且根据需要自动进入应急减速的安全运行模式。 It provides real-time monitoring of sliding data, and can automatically enter the safe operation mode for emergency according to requirements.
● 抱闸检测保护 Brake detection protection	通过抱闸臂检测开关对抱闸的打开与闭合实时监测。当抱闸未按要求打开时，系统将禁止电梯启动。 Brake arm detection switch executes real-time monitor to brake opening / closing. If the brake does not open by the requirements, the system will not start the elevator.
● 门区外不能开门的保护 Protection of none door opening outside door zone	在非门区状态，禁止自动开门。 Automatic door opening is forbidden under none door zone condition.
● 低速保护 Low-speed protection	为防止电梯在控制范围外低速运行导致安全问题而设置的保护。 It prevents elevator from low-speed running outside the control range causing any safety problem(s).
● 超载保护 Overload protection	在电梯关门运行前，当检测到超载信号时，电梯不能关门运行，并且关门按钮无效。超载消除后自动恢复正常。 Before the elevator shuts the door, if it detects overload signal, the elevator does not shut then, "door-shut button" becomes effective. After it removes overload problem, it re-starts automatically.
● 故障自动靠站 Automatic parking in trouble	正常运行中的电梯因故障在非平层区域内停止时，只要不是安全装置动作而引起，则电梯以低速向中间楼层方向进行自救运行，并在最近服务层停层开门，以防止困人事故的发生。 When the elevator stops in none leveling zone due to any trouble, if it is not caused by safety device action, it executes self-rescue running towards the middle floor direction at low speed. It parks and opens the door at the nearest service floor to prevent from any trapping accident.
● 电梯受阻保护 Protection of elevator blockage	系统发出起动命令，但在预定的时间内未能正常起动，或电梯在运行，但在预定的时间内未能到达一定的距离，电梯停止运行。 When the system runs start command, it does not start within preset time nor because it is during the elevator travelling, and it does not reach certain distance within preset time as well, the elevator stops accordingly.
● 有司机运行 Attendant running	电梯工作在司机状态，系统按轿内指令信号运行。如有层站召唤信号，顺向层站召唤自动截车。平层停车后自动开门，但不自动关门，需由司机按动关门按钮。 When it is under the operator condition, the elevator system operates according to the car command signal. If landing call signal is available, it automatically cuts as per forward landing call. The door opens automatically after the leveling parking. But it does not shut automatically until the operator presses "door closing button".
● 消防返回 Fire-fighting return	消防开关闭合后系统进入消防返回状态：系统将消除所有层站召唤和轿内指令信号，自动返回消防基站，保持开门。如电梯正在反方向运行，则就近层停车不开门返回消防基站，保持开门。 When the fire-fighting switch closes, the system enters into fire-fighting running. The system will remove all the landing calls and car command signals, and it automatically returns to fire-fighting home landing, and the door keeps open. If the elevator is travelling in reverse direction, it parks at nearby floor, and returns to fire-fighting home landing with the door keeping closed, after that it keeps the door open.
○ 消防运行 Fire-fighting running	消防开关闭合后系统进入消防运行：系统将消除所有层站召唤和轿内指令信号，自动返回消防基站，保持开门。如电梯正在反方向运行，则就近层停车不开门返回消防基站，保持开门并由消防员控制运行。 When the fire-fighting switch closes, the system enters into fire-fighting running. The system will remove all the landing calls and car command signals, and it automatically returns to fire-fighting home landing, and the door keeps open. If the elevator is travelling in reverse direction, it parks at nearby floor, and returns to fire-fighting home
● 基站锁梯 Home landing elevator locking	电梯处于自动状态，关闭基站锁梯开关后，电梯将所登记的轿内指令服务完毕后自动返回基站，电梯进入驻停状态。一旦打开锁梯开关，电梯会立即退出驻停状态，投入正常运行。 When the elevator is under automatic condition, when it shuts home landing locking switch, the elevator will complete all the registered car command services, automatically return to home landing, it enters into parking condition. As soon as locking switch is on, it immediately returns from parking condition and goes into normal running.

● 标准; ○ 无偿选配; ○ 有偿选配
● Standard ○ Free optional ○ Charged optional

● 误登记取消 Cancel the error-register	若乘客误按了某层轿内指令按钮并已登记（轿内指令灯亮），则在电梯未运行状态下，只需再按一次该层轿内指令按钮即取消该登记（轿内指令灯灭）。 If the passenger presses the car command button at certain floor and has registered it by mistake, (by then the car indicating lamp is bright), if under the condition of none elevator running, you only press the car command button at the same floor to cancel the register. (By then the car indicating lamp dies out.)
○ 轿厢到站钟 Car arrival gong	通过轿厢顶的钟声，提醒在轿厢内的乘客和等候在电梯候梯厅内的乘客该电梯即将到站。 Arrival gong on top of the car reminds the passengers in the car and those waiting in the hall that the elevator has arrived.
○ 语音报站 Phonic station reporter	由语音报站装置通知乘客电梯运行相关信息：在电梯到站前播报将要到站的层楼，在关门运行前播报将要运行的方向等。 Phonic station reporter informs the passengers of the relevant elevator running information. It announces the arriving landing, the traveling direction etc. before door-close and running.
● 通电自动开门 Electrified automatic door-opening	每次电梯上电，如轿厢正在门区，电梯门将自动打开。 Every time when the elevator is electrified, if the car is in the door zone, the elevator door opens automatically.
○ 自动返基站 Automatic return to home landing	无司机运行时，如果自动返基站功能设置有效，当无层站召唤信号时间到达预定的时间后，电梯自动返回基站。 In non-attendant running, if automatic return function to home landing is still effective, and no-landing call signal time fulfills preset time, the elevator returns to home landing automatically.
● 轿厢内照明及风扇自动停止 Automatic stop of the car illumination and fan	如一定时间电梯无人使用，轿厢内照明和风扇将自动关闭。接到任何层站召唤命令后自动打开。 If nobody uses the elevator within certain period of time, the car illumination and fan shut off automatically and re-opens on receiving any landing call command(s).
● 楼层信号自动校正 Automatic correction of floor signal	如果楼层显示位置有误差，系统在运行中检测到端站开关后，将自动校正楼层显示。 If the floor display position has error, after the system detects terminal switch in the travel, it will automatically correct the floor display.
● 轿内反向指令消除 Cancellation of the reverse command(s) in the car	当电梯运行至最远端楼层换速时，清除所有的轿内指令登记。 When the elevator travels to the farthest floor and changes the speed, it removes all the car command register.
● 呼梯按钮嵌入自诊断 Self-diagnostic embedded call button	若某一层站召唤按钮按下时间超过20秒而未断开，则系统认为该按钮嵌入。以后对该层层站召唤不予登记，且该按钮对应的应答灯不断闪烁报警。当该按钮断开时，退出上述状态。 If you press call button at certain landing for over 20 second, and it still does not disconnect, the system assumes that it is embedded button. It does not register the landing call of the same floor afterwards. Responsive lamp which corresponds to the button keeps flickering and alarming. When the button disconnects, it exits from above condition.
○ 再平层功能 Re-leveling function	电梯停在当前层，当过多乘客进入电梯或离开电梯时，由于钢丝绳的伸长或缩短，轿厢脱离平层区域，电梯将在开门的情况下以低速运行至平层位置。 If the elevator parks on the current floor, when too many passengers enter into / leave the elevator, the car is separated from the leveling zone because of wire rope extension or shortening. The elevator will then travel to the leveling position at low speed under the condition of door-opening.
○ 信号接口装置 Signal interface position	通过信号接口装置输出电梯的基本运行状态信号。 It outputs basic running condition signal through the signal interface device.
○ 自动应急平层运行 Automatic emergency leveling travel	如果自动应急平层功能设置有效，并配置了“自动应急平层装置”，满足自动应急平层条件，电网停电后由电梯自动应急平层装置供电运行到达最近层站的平层位置，开门，让乘客安全撤离轿厢。 If automatic emergency leveling function setting is effective, it is equipped with "automatic emergency leveling device" to satisfy automatic emergency leveling conditions. After power grid fails, automatic emergency leveling device supplies electricity and the elevator travels to the leveling position of the nearest landing. It opens the door, for safe evacuation of the passengers from the car.
○ 远程监控 Remote Monitoring	通过信号接口装置、及无线网络技术，用户只需登入相应服务器即可查看信息，对电梯故障率、故障时间等进行统计分析也可实现故障短信报警。 Through signal interface device and wireless network technology, user can log in the corresponding server to check information, make statistical analysis of elevator failure rate and failure time, and achieve fault message alarm.
○ 能量回馈 Energy feedback	当配置了能量回馈装置时，将电梯轻载上行和重载下行时产生的能量回馈电网或供周边设备使用，以达到节能目的。 When energy feedback device is installed, the energy produced during the elevator light-load up-motion and heavy-load down-motion will be used by power grid and the surrounding equipments. It fulfills the energy-saving purposes.

土建参数

Construction parameters

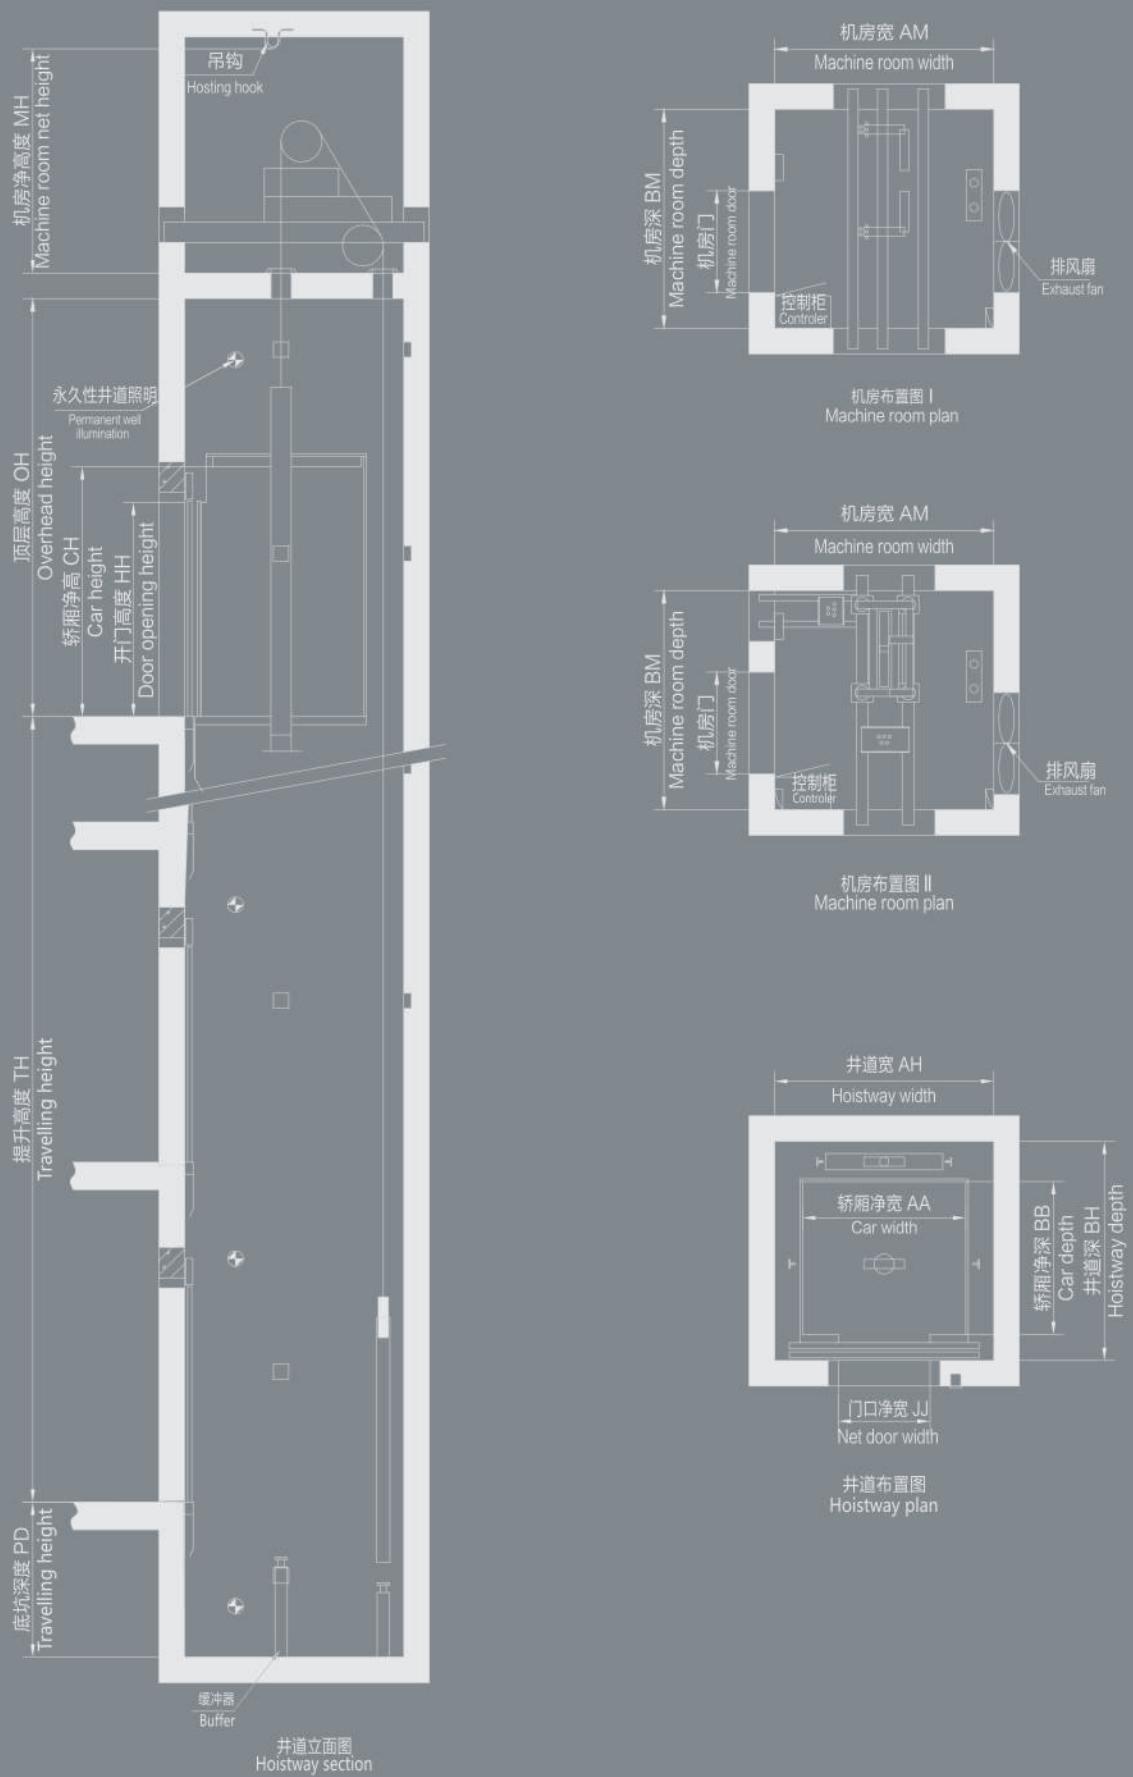

对重后置乘客电梯KLK1参数表 (银燕系列)

Counterweight Rear Type Passenger Elevator KLK1(Silver Swallow Series)

载重量 Loading capacity	额定速度 Rated speed	开门宽度 Door opening width	开门高度 Door opening height	轿厢尺寸(mm) Car size			井道尺寸(mm) Hoistway size	机房尺寸(mm) Machine room size	顶层高度 Width (mm) Top floor height	底坑深度 Depth (mm) Pit depth	最大提升高度 (m) Max.travelling height
				宽 Width	深 Depth	高 Height					
450	1.0	800	2100	1100	1100	2300	1900	1750	1900	1750	4150
	1.6	800	2100	1100	1100	2300	1900	1750	1900	1750	4200
	1.0	800	2100	1400	1100	2400	1950	1750	1950	1750	4150
	1.6	800	2100	1400	1100	2400	1950	1750	1950	1750	4200
630	1.75	800	2100	1400	1100	2400	1950	1750	1950	1750	4250
	1.0	800	2100	1400	1100	2400	1950	1750	1950	1750	4450
	1.6	800	2100	1400	1350	2400	1950	2000	1950	2000	4150
	1.75	800	2100	1400	1350	2400	1950	2000	1950	2000	4250
800	2.0	800	2100	1400	1350	2400	1950	2000	1950	2000	4550
	2.5	800	2100	1400	1350	2400	1950	2000	1950	2000	5000
	1.0	900	2100	1600	1400	2400	2150	2050	2150	2050	4150
	1.6	900	2100	1600	1400	2400	2150	2050	2150	2050	4200
1000	1.75	900	2100	1600	1400	2400	2150	2050	2150	2050	4250
	2.0	900	2100	1600	1400	2400	2150	2050	2150	2050	4550
	2.5	900	2100	1600	1400	2400	2150	2050	2150	2050	5000
	1.0	900	2100	1600	1500	2400	2150	2150	2150	2150	4150
1050	1.6	900	2100	1600	1500	2400	2150	2150	2150	2150	4200
	1.75	900	2100	1600	1500	2400	2150	2150	2150	2150	4250
	2.0	900	2100	1600	1500	2400	2150	2150	2150	2150	4650
	2.5	900	2100	1600	1500	2400	2150	2150	2150	2150	5000
1150	1.0	1100	2100	1800	1400	2400	2400	2050	2400	2050	4700
	1.6	1100	2100	1800	1400	2400	2400	2050	2400	2050	4800
	1.75	1100	2100	1800	1400	2400	2400	2050	2400	2050	5100
	2.0	1100	2100	1800	1400	2400	2400	2050	2400	2050	5200
1250	2.5	1100	2100	1800	1400	2400	2400	2050	2400	2050	5500
	1.0	1100	2100	1950	1400	2400	2550	2050	2550	2050	4600
	1.6	1100	2100	1950	1400	2400	2550	2150	2550	2150	4650
	1.75	1100	2100	1950	1400	2400	2550	2050	2550	2050	4700
1350	2.0	1100	2100	1950	1500	2400	2550	2150	2550	2150	4800
	2.5	1100	2100	1950	1500	2400	2550	2150	2550	2150	5100
	1.0	1100	2100	1950	1500	2400	2550	2150	2550	2150	4600
	1.6	1100	2100	1950	1500	2400	2550	2150	2550	2150	4650
1600	1.75	1100	2100	1950	1750	2400	2550	2400	2550	2400	4700
	2.0	1100	2100	1950	1750	2400	2550	2400	2550	2400	4800
	1.0	1100	2100	1950	1750	2400	2550	2400	2550	2400	4600
	1.6	1100	2100	1950	1750	2400	2550	2400	2550	2400	4650

